



## **NKE single row angular contact ball bearings**

- > Premium quality
- > For high speeds
- > For high radial and thrust loads
- > Numerous variants for multifaceted applications

*More possibilities!*

**NKE**  
B E A R I N G S

## How to contact your authorised distributor

### Distribution Centres

#### Rotherham CDC

**T** 0845 602 9946

**F** 01709 789 988

**E** [sales@acorn-ind.co.uk](mailto:sales@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk](http://www.acorn-ind.co.uk)

#### Midlands RDC

**T** 0121 521 5999

**F** 0121 521 5888

**E** [midlands@acorn-ind.co.uk](mailto:midlands@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk/midlands](http://www.acorn-ind.co.uk/midlands)

#### North East RDC

**T** 0191 417 8899

**F** 0191 419 0001

**E** [northeast@acorn-ind.co.uk](mailto:northeast@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk/northeast](http://www.acorn-ind.co.uk/northeast)

#### South West RDC

**T** 01179 820 414

**F** 01179 823 222

**E** [southwest@acorn-ind.co.uk](mailto:southwest@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk/southwest](http://www.acorn-ind.co.uk/southwest)

### Regional Branches

#### North West Branch

**T** 0845 602 3568

**F** 01229 833 510

**E** [northwest@acorn-ind.co.uk](mailto:northwest@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk/northwest](http://www.acorn-ind.co.uk/northwest)

#### Scotland Branch

**T** 01506 476 199

**F** 01506 462 655

**E** [scotland@acorn-ind.co.uk](mailto:scotland@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk/scotland](http://www.acorn-ind.co.uk/scotland)

### Divisions

#### Export Division

**T** +44 1709 789 933

**F** +44 1709 789 966

**E** [export@acorn-ind.co.uk](mailto:export@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk/export](http://www.acorn-ind.co.uk/export)

#### Linear Division

**T** 01709 789 949

**E** [linear@acorn-ind.co.uk](mailto:linear@acorn-ind.co.uk)

**W** [www.acorn-ind.co.uk/linear](http://www.acorn-ind.co.uk/linear)

# NKE single row angular contact ball bearings

- > For high speeds, radial and thrust loads
- > Multifaceted applications

## Technical characteristics

NKE single row angular contact ball bearings are non separable radial bearings:

- > Suitable for high-speed applications
- > Can accommodate both radial and thrust loads
- > Suitable for combined loads and tilting moments
- > Provide rigid bearing arrangements
- > Available in universal design to be used in pairs or sets

## Design variants

- > Different contact angles ( $\alpha$  - see figure on right) for taking up loads optimally
- > Series 72 and 73 are available with re-enforced internal design (suffix BE - see figure below)
- > Cage variants:
  - Pressed steel (J)
  - Pressed brass (Y)
  - Polyamide (TVP)
  - Hard fabrics (TPA)
  - Machined solid brass (MP)
- > Sealed variants for maintenance free bearing positions
- > Special clearances and preloads upon request

## Re-enforced internal design (BE) – higher load rating



**B**

*Conventional Design*




**BE**

*Re-enforced design for higher load ratings*

## Contact angles ( $\alpha$ )

NKE single row angular contact ball bearings (series 72 and 73) are produced with several different contact angles, which are identified by various suffixes:

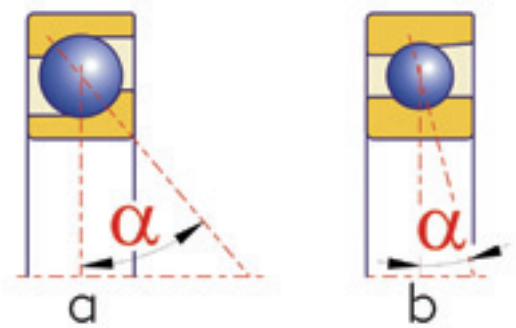

Suffix	Contact angle $\alpha$
A	30°
B	40°
C	15°
E	25°

## Typical applications

- > Gearboxes
- > Agricultural machinery
- > Pumps and compressors
- > Ventilators
- > Machine tools
- > Etc.

Please refer to the NKE General Catalogue for more information.

Every care has been taken to ensure the accuracy of the information contained in this publication, but NKE accepts no liability due to errors or omissions. NKE reserves the right to change any product specifications. © NKE AUSTRIA GmbH.