



NKE electrically insulated rolling bearings

- > Optimum protection against bearing damage caused by the passage of currents

More possibilities!

NKE
B E A R I N G S

NKE electrically insulated rolling bearings


- > Simple, effective electrical isolation with bearings
- > Optimum protection against the passage of currents

Bearing damage by the passage of electrical currents

Under adverse conditions the rolling bearings used in electrical machines can sustain damage through current discharge.

Especially in modern machines with their high power density and high customer requirements concerning service life and operating reliability, failures by electrical corrosion can cause serious problems.

How electrical corrosion works

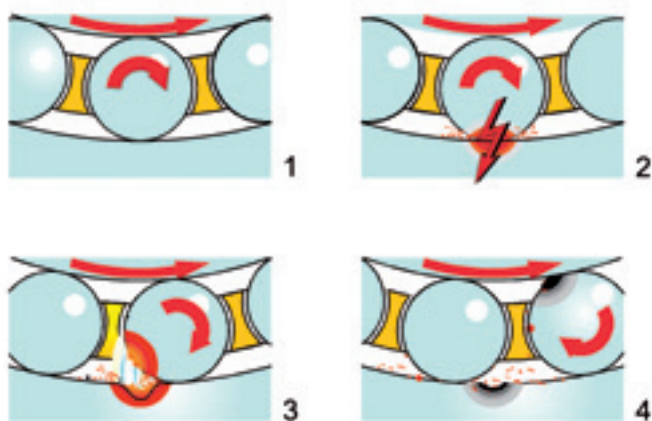

1. In the rotating bearing a potential difference occurs between the shaft (inner ring) and housing (outer ring).
2. When this voltage reaches a certain level, the lubricant film between the bearing's metallic parts is breached and roughness peaks of the rolling element and the raceway can be fused together momentarily.
3. During the subsequent rolling motion the fused areas are separated again and an electric arc forms between the rolling element and the raceway causing further fusion penetration. These arc craters are areas with a significantly altered microstructure. These processes destroy the surface quality.
4. As the bearing continues to operate, material particles are released from these damaged areas and get into the rolling contact zone. There they cause local overloading of the bearing material, resulting in rapidly accelerated material fatigue.

The solution: Electrically insulated rolling bearings from NKE

NKE electrically insulated rolling bearings reliably prevent current discharge. Three versions are available:

- > **Bearings with oxide ceramic insulating layers** – Applied with plasma technology, the insulation has a guaranteed dielectric strength of at least 1000 V AC or DC.
SQ77: Insulation on the outer ring
SQ77E: Insulation on the inner ring

- > **SQ77B (hybrid bearing):** Rolling bearing with oxide ceramic rolling elements. Resistance of insulation theoretically ∞ . (see illustration)

NKE hybrid bearings with ceramic rolling elements



Advantages

- > Higher operational reliability through optimum protection against electrical corrosion
- > More economic than, for example, insulation on housings or shafts
- > Interchangeable: Same key dimensions and technical properties as conventional bearings
- > Coating resistant to damage if correctly handled

Typical applications

- > Electric motors, generators, etc.

Every care has been taken to ensure the accuracy of the information contained in this publication, but NKE accepts no liability due to errors or omissions. NKE reserves the right to change any product specifications. © NKE AUSTRIA GmbH.

How to contact your authorised distributor

Distribution Centres

Rotherham CDC

T 0845 602 9946

F 01709 789 988

E sales@acorn-ind.co.uk

W www.acorn-ind.co.uk

Midlands RDC

T 0121 521 5999

F 0121 521 5888

E midlands@acorn-ind.co.uk

W www.acorn-ind.co.uk/midlands

North East RDC

T 0191 417 8899

F 0191 419 0001

E northeast@acorn-ind.co.uk

W www.acorn-ind.co.uk/northeast

South West RDC

T 01179 820 414

F 01179 823 222

E southwest@acorn-ind.co.uk

W www.acorn-ind.co.uk/southwest

Regional Branches

North West Branch

T 0845 602 3568

F 01229 833 510

E northwest@acorn-ind.co.uk

W www.acorn-ind.co.uk/northwest

Scotland Branch

T 01506 476 199

F 01506 462 655

E scotland@acorn-ind.co.uk

W www.acorn-ind.co.uk/scotland

Divisions

Export Division

T +44 1709 789 933

F +44 1709 789 966

E export@acorn-ind.co.uk

W www.acorn-ind.co.uk/export

Linear Division

T 01709 789 949

E linear@acorn-ind.co.uk

W www.acorn-ind.co.uk/linear