

Linear Evolution _ Telescopic Line



Acorn Industrial Services Ltd



Central distribution centre

Acorn CDC

- 1 01709 789 955
- **E** 01709 789 951
- north@acorn-ind.co.uk
- W www.acorn-ind.co.uk/north

Divisions

- Linear Division
- 1 01709 789 949
- **F** 01709 789951
- E linear@acorn-ind.co.uk
- www.acorn-ind.co.uk/linear-sales

Couplings Division

- 01709 789 957
- **F** 01709 789 951
- **E** couplings@acorn-ind.co.uk
- www.acorn-ind.co.uk/coupling-sales

Export Division

- +44 1709 789 933
- **E** +44 1709 789 966
- E export@acorn-ind.co.uk
- www.acorn-ind.co.uk/export-sales

Regional Distribution Centres

Deeside RDC

- 1 01244 281 280
- F 01244 281 671
- **■** deeside@acorn-ind.co.uk
- www.acorn-ind.co.uk/deeside

North East RDC

- 1 0191 417 8899
- **F** 0191 419 0001
- E northeast@acorn-ind.co.uk
- www.acorn-ind.co.uk/northeast

East Midlands RDC

- 1 01246 236 400
- F 01246 202 898
- **E** <u>eastmidlands@acorn-ind.co.uk</u>
- www.acorn-ind.co.uk/eastmidlands

North West RDC

- 1 0845 602 3568
- F 01229 833510
- E northwest@acorn-ind.co.uk
- www.acorn-ind.co.uk/northwest

Fife RDC

- 1 01592 772 275
- **F** 01592 773 390
- E fife@acorn-ind.co.uk www.acorn-ind.co.uk/fife

- Scotland RDC 1 01506 476 199
- **F** 01506 462 655
- **E** scotland@acorn-ind.co.uk www.acorn-ind.co.uk/scotland

Midlands RDC

- 1 0121 569 7888
- **F** 0121 569 7877
- E midlands@acorn-ind.co.uk
- www.acorn-ind.co.uk/midlands

- South West RDC 1 01179 820 414
- **E** 01179 823 222
- **E** southwest@acorn-ind.co.uk
- www.acorn-ind.co.uk/southwest

Rollon S.p.A. was set up in 1975 as a manufacturer of linear motion components. Today Rollon group is a leading name in the design, production and sale of linear rails, telescopic rails and actuators, with headquarters based in Italy and offices and distributors located throughout the world. Rollon products are used in many industries with creative and efficient solutions in a wide range of applications used on a daily basis.

Solutions for linear motion



Linear Rails

Rails with roller bearings
Rails with caged ball bearings
Rails with recirculating ball bearing



Telescopic Rails

Rails with partial/total extension Heavy duty rails Rails for and automated/manual applications



Actuators

Belt driven actuators Ball screw driven actuators Rack and pinion actuators

Core Competencies

- Full range of linear rails, telescopic rails and actuators
- **►** Worldwide presence with branches and distributors
- Fast delivery all over the world
- Large technical know-how for applications



Standard solutions

Wide range of products and sizes Linear rails with roller and caged ball bearings

Heavy duty telescopic rails Belt or ball screw driven linear actuators Multi-axis systems





Collaboration

optimization

International know-how in several industries
Project consultancy
Maximizing performance and cost



Customization

Special products

Research and development of new solutions

Technologies dedicated to different sectors

Optimal surface trea



Applications



















Content

Telescopic Rail



Technical features overview

Telescopic Rail: Seven models with full and partial extension	TR-2
2 Technical data	
Performance characteristics and notes	TR-5
3 Dimensions and load capacity	
ASN	TR-6
DSS	TR-10
DSB	TR-13
DSD	TR-14
DSC	TR-16
DE	TR-18
DED	TR-21
DBN	TR-23
DMS	TR-26
DRT	TR-28
4 Technical instructions	
Telescopic rail selection. Static load check	TR-30
Deflection	TR-31
Static load	TR-32
Service life	TR-33
Speed, Extension and extraction force,	
Double-sided stroke, Temperature	TR-36
Anticorrosive protection, Lubrication	TR-37
Fixing screws	TR-38
Installation instructions	TR-39
Ordering key	
Ordering key with explanations	TR-41

Deti Rail



1 Product explanation	
Fully extending telescopic rails for manual movement	0R-2
2 Technical data	
Performance characteristics and notes	0R-4
3 Dimensions and load capacity	
LTH30 RF	0R-5
LTH30 KF	0R-6
LTH45 RF	0R-7
LTH45 KF	0R-8
LFT44	0R-9
4 Technical instructions	
Load capacity, Extension and extraction force	OR-10
Anticorrosive protection, Temperature,	
Lubrication, Installation instructions	0R-11
Ordering key	
Ordering key with explanations	OR-12

Light Rail



1 Product explanation	
Light telescopic rails, with full or partial extension	LR-2
2 Technical data	
Performance characteristics and notes	LR-4
3 Dimensions and load capacity	
LPS 38	LR-5
LFS 46	LR-6
LFS 57	LR-7
LFS 58 SC	LR-8
LFS 70	LR-9
LFX 27	LR-10
DRX/DRS	LR-11
4 Technical instructions	
Load capacities	LR-12
Speed, Temperature, Lubrication, Corrosion protection	LR-13
Installation instructions,	
DRX/DRS installation	LR-14
Ordering key	
Ordering key with explanations	I R-16

Guides suitable for all applications

Technical features overview



	Reference		Section	Pro	ofile	Self	Extension	Slider		Anticorrosion
	Family	Product		Туре	Hardened raceways	alignment		Balls	Rollers	
	V	ASN		Cold Drawn	V	+	50%			**
	Total San Control of C	DE		Cold Drawn	$\sqrt{}$	++	100%			**
		DS		Cold Drawn	V	++	100%			**
Telescopic Rail		DSC		Cold Drawn	$\sqrt{}$	++	100%	000000		**
	The state of the s	DBN		Cold Drawn	V	++	100%	000000		**
		DMS		Cold Drawn	\checkmark	++	100%	000000		**
	100	DRT		Cold Drawn	V	+	100%			**
Opti Rail	mine i f	LTH		Cold Drawn		++	100%	000000		**
opti naii	NOT TON	LTF		Cold Drawn		++	100%	000000		**
		LPS		Formed Sheetmetal		++	50%			•
Liebt De il		LFS		Formed Sheetmetal		++	100%			•
Light Rail		LFX		Formed Sheetmetal		++	100%	000000		* * *
		DRX/DRS		Formed Sheetmetal		++	100%			•••

The information shown must be verified for the specific application.

For a complete view of technical data, please consult our catalogs on www.rollon.com

 $^{^{\}star}$ The maximum value is defined by the application.

 $^{^{\}star\star} \, \text{Different anti-corrosion treatments are available. For more information, please contact Rollon.}$

 $[\]ensuremath{^{***}}$ For more information, please contact Rollon.

Size	Max. load capacity per slider [N]		Max. dynamic load capacity - [N]	Max. stroke	Max. rail length	Max. extension speed	Rigidity (deflection)	Operating temperature	
	C₀ rad	C _o ax	C 100	[mm]	[mm]	[m/s]	(doneous)		
22-28-35 -43-63	44247	30973	61688	1013	1970	0,8	+++	-30°C/+170°C	
22-28-35 -43-63	7198	3062	26338	2026	1970	0,8	+++	-30°C/+170°C	
28-35-43-63	12832		14483	2026	1970	0,8	++++	-30°C/+110°C	
43	5529	2075	14885	2028	1970	0,8	+++	-30°C/+110°C	
22-28-35-43	1331	1279	14483	2026	1970	0,8	+	-30°C/+170°C	
63	19812		30595	2266	2210	0,8	++++	-30°C/+110°C	
43	2860		6053	1980	1970	0,8	+++	-30°C/+110°C	
30-45	1673		***	1522	1500	0,3	++	-30°C/+170°C	
44	648		1000	1010	1000	0,3	+	-30°C/+170°C	
38	175	50	***	373	473	0,5	+	+10°C/+40°C	
46-57-58-70	650	115	***	1100	1100	0,5	+	+10°C/+40°C	
27	350	50	***	576	550	0,5	+	-30°C/+200°C	
30	360		***	1120	1040	0,8	+	-30°C/+100°C	





Telescopic Rail



Product explanation



Telescopic Rail: Seven models with full and partial extension



Fig. 1

The Telescopic Rail product line is made up of seven models with full and partial extension and various cross-sections and intermediate elements in S-shape, I-beam or square. High loads in combination with cost-efficiency and free movement have long been the outstanding properties of the Telescopic Rail product line.

The most important characteristics:

- High load capacity with low deflection
- Rigid intermediate elements
- Standardized hole locations
- Zero-play running even with maximum load
- Space saving design
- High reliability

Preferred areas of application of the Telescopic Rail product family:

- Railcars (e. g. maintenance and battery extensions, doors)
- Construction and machine technology (e.g., housings and doors)
- Logistics (e.g., extensions for containers or gripper movements)
- Automotive technology
- Packaging machines
- Beverage industry
- Special machines

ASN

Partially extending telescopic rail consisting of a guide rail and a slider. This compact and simple design allows for very high load capacities. When the guide rail is mounted to a structure a very high rigid system is created.



Fig. 2

DS

Fully extending telescopic rail consisting of a fixed guide rail, an identical moving guide rail, and an S-shaped intermediate element. This has a high moment of inertia and high rigidity in a slim size. This results in a high loading capacity with low deflection in the extended state.

The DS series is available in three different designs: DSS version with single direction stroke. DSB version with single direction stroke, and locking capability in the extended state, and the DSD version with double direction stroke.



Fig. 3

DSC

Fully extending telescopic rail consisting of a compact and flexurally rigid intermediate element that connects two different sized guide rails with each other as a fixed and moving element.

This design makes it possible to reduce all components to the necessary size and length for achieving the full stroke. The DSC series features high rigidity and a high load capacity in a compact size. This results in an optimal combination of performance and weight reduction.



Fig. 4

DE

Fully extending telescopic rail consisting of two guide rails, which are mounted on an I-beam profile to form the intermediate element, one moveable slider and one fixed slider which mounts onto the structure. The square cross-section allows a compact size with high load capacities and low deflection, especially with radial loading. Also available with a double stroke design, which includes an eccentrically located driving disc for simultaneous movement.

For double sided extensions, a dedicated DE...D version is available with a driving disc.



Fig. 5

DBN

Fully extending telescopic rail consisting of two guide rails, one which is fixed to a structure, and one which is moveable, and two sliders which are mounted together and form the intermediate element. The size is similar to the DE series and offers good protection from contamination of the ballcage.



Fig. 6

DMS

Heavy load telescopic consisting of elements from the ASN series and an extremely rigid I-beam profile as the intermediate element. This fully extending telescopic rail is used to accept very heavy loads with low deflection.



Fig. 7

DRT

Fully extending telescopic rail on a roller slide base consisting of the S-shaped intermediate element from the DS series, and elements of the proven Compact Rail roller slider system. The use of roller sliders instead of a linear bearing as the load accepting element, enables a large resistance to contamination and an extremely quiet motion.



Fig. 8

Technical data



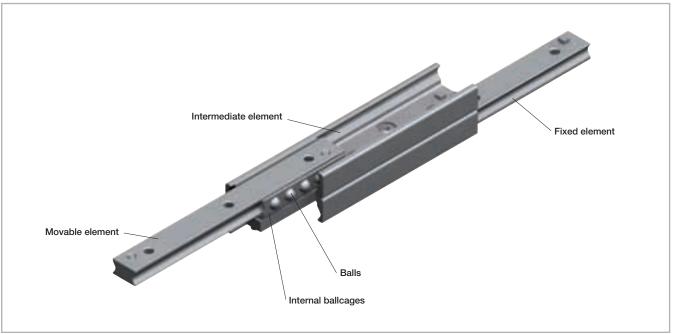


Fig. 9

Performance characteristics:

- Available sizes ASN / DE: 22, 28, 35, 43, 63
- Available sizes DS: 28, 35, 43, 63
- Available sizes DSC: 43
- Available sizes DBN: 22, 28, 35, 43
- Available size DMS: 63
- Available size DRT: 43
- Induction hardened raceways
- Rails and sliders made of cold-drawn roller bearing carbon steel
- Balls made of hardened roller bearing carbon steel
- Max. operating speed: 0.8 m/s (31.5 in/s) (depending on application)
- ASN, DE, DBN, temperature range: -30 °C to +170 °C (-22 °F to +338 °F), DS, DSC, DRT: -30 °C to +110 °C (-22 °F to +230 °F)
- Electrolytic galvanised as per ISO 2081, increased anticorrosive protection on request (see pg. TR-35 Anticorrosive protection)


Remarks:

- Horizontal movement installation is recommended
- Vertical movement installation on request
- External end stops are recommended
- Double-sided stroke in ASN, DSD, DE, DBN series (DMS on request)
- Custom strokes on request
- All load capacity data is based on one telescopic rail
- All load capacity data is based on continuous operation
- Calculation of the service life is based exclusively on the loaded rows
 of halls
- For models DSB, DMS and DRT, please observe right or left side use
- DRT 43 must be fixed with Torx® screws (custom design, included in delivery) ASN 63 and DMS 63 can be fixed with Torx® screws as an alternative
- Fixing screws of property class 10.9 must be used for all telescopic rails
- Internal stops are used to stop the unloaded slider and the ball cage.Please use external stops as end stops for a loaded system

Dimensions and load capacity



ASN

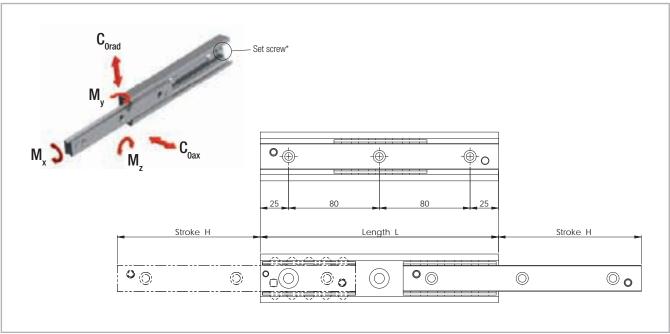

* Remove the set screw to reach all the fixing holes. See also assembly instructions on page TR-39f.


Fig. 10

Туре	Size	Length	Stroke		Load capacities and moments						
		[mm]	H [mm]	C _{0rad} [N]	C _{0ax} [N]	M _x [Nm]	M _y [Nm]	M _z [Nm]	holes		
		130	76	313	219	5,7	10	15	2		
		210	111	715	501	10,7	36	51	3		
		290	154	994	696	14,9	69	99	4		
		370	196	1278	895	19	113	162	5		
ASN	22	450	231	1701	1190	24	180	258	6		
		530	274	1979	1385	28,2	248	355	7		
		610	316	2262	1584	32,3	327	467	8		
		690	351	2689	1882	37,3	436	623	9		
		770	394	2967	2077	41,5	539	769	10		

Time	Туре	Size	Length	Stroke		Load cap	acities and	moments		No. of
ASN 28 210 116 1116 1116 781 26,1 57 82 3 290 148 1934 1354 39,6 132 188 4 370 190 2445 1711 50,4 213 305 5 450 232 2955 2069 61,2 314 449 6 530 274 3466 2426 72 435 621 7 610 316 3976 2783 82,8 575 821 8 690 358 4487 3141 93,6 735 1050 9 770 400 4997 3498 104,4 914 1306 10 850 433 5828 4080 117,9 1165 1665 11 930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 ASN 35 850 433 776 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 771 1015 8 99 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6837 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			[mm]	H [mm]	C _{0rad} [N]	C _{0ax} [N]		M _y [Nm]		holes
ASN 28 290 148 1934 1354 1936 136 2445 1711 50,4 213 305 5 450 232 2955 2069 61,2 314 449 6 530 274 3466 2426 72 435 621 7 610 316 3976 2783 82,8 575 821 8 690 358 4487 3141 93,6 735 1050 9 770 400 4997 3498 104,4 914 1306 10 850 433 5828 4080 117,9 1165 1665 11 930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2032 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17			130	74	613	429	15,3	20	28	2
ASN 28 370 190 2445 1711 50,4 213 305 5 450 232 2955 2069 61,2 314 449 6 530 274 3466 2426 72 435 621 7 610 316 3976 2783 82,8 575 821 8 690 358 4487 3141 93,6 735 1050 9 770 400 4997 3498 104,4 914 1306 10 850 433 5828 4080 117,9 1165 1665 11 930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			210	116	1116	781	26,1	57	82	3
ASN 28 450 232 2955 2069 61,2 314 449 6 530 274 3466 2426 72 435 621 7 610 316 3976 2783 82,8 575 821 8 690 358 4487 3141 93,6 735 1050 9 770 400 4997 3498 104,4 914 1306 10 850 433 5828 4080 117,9 1165 1665 11 930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			290	148	1934	1354	39,6	132	188	4
ASN 28 530 274 3466 2426 72 435 621 7 610 316 3976 2783 82,8 575 821 8 690 358 4487 3141 93,6 735 1050 9 770 400 4997 3498 104,4 914 1306 10 850 433 5828 4080 117,9 1165 1665 11 930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 290 159 2060 1442 46,9 146 208 4 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			370	190	2445	1711	50,4	213	305	5
ASN 28			450	232	2955	2069	61,2	314	449	6
ASN 28 690 358 4487 3141 93,6 735 1050 9 770 400 4997 3498 104,4 914 1306 10 850 433 5828 4080 117,9 1165 1665 11 930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 210 127 1065 746 29,4 57 82 3 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			530	274	3466	2426	72	435	621	7
690 358 4487 3141 93,6 735 1050 9 770 400 4997 3498 104,4 914 1306 10 850 433 5828 4080 117,9 1165 1665 11 930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 210 127 1065 746 29,4 57 82 3 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18	ACNI	00	610	316	3976	2783	82,8	575	821	8
850	ASIN	28	690	358	4487	3141	93,6	735	1050	9
930 475 6338 4436 128,7 1389 1984 12 1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 210 127 1065 746 29,4 57 82 3 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			770	400	4997	3498	104,4	914	1306	10
1010 517 6848 4793 139,5 1631 2330 13 1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 210 127 1065 746 29,4 57 82 3 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			850	433	5828	4080	117,9	1165	1665	11
1090 559 7358 5150 150,3 1894 2705 14 1170 601 7868 5507 161,1 2175 3108 15 210 127 1065 746 29,4 57 82 3 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			930	475	6338	4436	128,7	1389	1984	12
1170 601 7868 5507 161,1 2175 3108 15 210 127 1065 746 29,4 57 82 3 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			1010	517	6848	4793	139,5	1631	2330	13
ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			1090	559	7358	5150	150,3	1894	2705	14
ASN 35 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 10 4850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			1170	601	7868	5507	161,1	2175	3108	15
ASN 35 290 159 2060 1442 46,9 146 208 4 370 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 10 4850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18										
ASN 35 203 2638 1847 59,9 238 340 5 450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			210	127	1065	746	29,4	57	82	3
450 247 3217 2252 73 354 505 6 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582			290	159	2060	1442	46,9	146	208	4
ASN 530 279 4282 2997 90,4 543 775 7 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 10 10 10 10 10 10			370	203	2638	1847	59,9	238	340	5
ASN 610 323 4858 3401 103,5 711 1015 8 690 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			450	247	3217	2252	73	354	505	6
ASN 369 367 5435 3804 116,6 902 1288 9 770 399 6521 4565 134 1191 1702 10 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			530	279	4282	2997	90,4	543	775	7
ASN 35 850 443 7095 4966 147,1 1435 2050 11 930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			610	323	4858	3401	103,5	711	1015	8
ASN			690	367	5435	3804	116,6	902	1288	9
930 487 7669 5368 160,2 1702 2431 12 1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			770	399	6521	4565	134	1191	1702	10
1010 519 8765 6136 177,6 2092 2989 13 1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18	ASN	35	850	443	7095	4966	147,1	1435	2050	11
1090 563 9337 6536 190,7 2412 3445 14 1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			930	487	7669	5368	160,2	1702	2431	12
1170 607 9909 6937 203,8 2754 3934 15 1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			1010	519	8765	6136	177,6	2092	2989	13
1250 639 11012 7708 221,2 3245 4636 16 1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			1090	563	9337	6536	190,7	2412	3445	14
1330 683 11582 8107 234,3 3640 5200 17 1410 727 12153 8507 247,4 4058 5797 18			1170	607	9909	6937	203,8	2754	3934	15
1410 727 12153 8507 247,4 4058 5797 18			1250	639	11012	7708	221,2	3245	4636	16
			1330	683	11582	8107	234,3	3640	5200	17
1490 759 13260 9282 264.8 4650 6643 19			1410	727	12153	8507	247,4	4058	5797	18
			1490	759	13260	9282	264,8	4650	6643	19

Туре	Size	Length	Stroke		No. of				
		[mm]	H [mm]	C _{0rad} [N]	C _{0ax} [N]	M _x [Nm]	M _y [Nm]	M _z [Nm]	holes
		210	123	1595	1117	60.6	84	120	3
		290	158	2872	2010	93.8	201	288	4
		370	208	3377	2364	115.9	308	440	5
		450	243	4690	3283	149.2	509	728	6
		530	278	6039	4227	182.4	762	1088	7
		610	313	7411	5188	215.6	1064	1521	8
		690	363	7863	5504	237.8	1294	1849	9
		770	398	9232	6463	271	1681	2402	10
		850	433	10615	7431	304.2	2119	3027	11
		930	483	11054	7738	326.4	2439	3484	12
		1010	518	12434	8704	359.6	2961	4230	13
ASN	43	1090	568	12877	9014	381.8	3337	4767	14
		1170	603	14254	9978	415	3943	5633	15
		1250	638	15638	10947	448.2	4599	6571	16
		1330	688	16075	11252	470.4	5065	7236	17
		1410	723	17456	12219	503.6	5806	8295	18
		1490	758	18845	13191	536.8	6598	9425	19
		1570	793	20238	14167	570.1	7440	10628	20
		1650	843	20661	14463	592.2	8029	11470	21
		1730	878	22052	15436	625.5	8956	12794	22
		1810	928	22479	15736	647.6	9601	13716	23
		1890	963	23867	16707	680.8	10612	15160	24
		1970	1013	24298	17009	703	11314	16162	25
		610	333	10591	7414	474	1553	2219	8
		690	373	12534	8774	547.5	2072	2960	9
		770	413	14489	10142	621	2666	3808	10
		850	453	16452	11516	694.5	3334	4763	11
		930	493	18421	12895	768	4077	5824	12
		1010	533	20395	14277	841.4	4894	6992	13
		1090	573	22373	15661	914.9	5787	8267	14
		1170	613	24354	17048	988.4	6754	9648	15
AON	00	1250	653	26337	18436	1061.9	7795	11136	16
ASN	63	1330	693	28322	19825	1135.4	8912	12731	17
		1410	733	30309	21216	1208.9	10102	14432	18
		1490	773	32297	22608	1282.4	11368	16240	19
		1570	813	34287	24001	1355.9	12708	18155	20
		1650	853	36277	25394	1429.4	14123	20176	21
		1730	893	38268	26788	1502.8	15613	22304	22
		1810	933	40261	28182	1576.3	17177	24539	23
		1890	973	42253	29577	1649.8	18816	26880	24
		1970	1013	44247	30973	1723.3	20530	29328	25

ASN

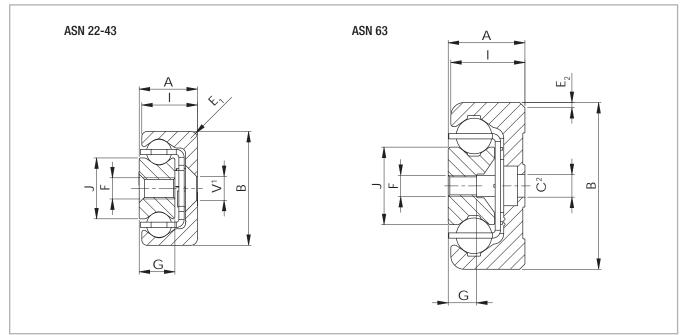

¹ Fixing holes (V) for countersunk head screws according to DIN 7991
² Fixing holes (C) for socket cap screws according to DIN 7984. Alternative fixing with Torx® screws in special design with low head (on request)

Fig. 11

Туре	Size		Cross-section									Weight
		A [mm]	B [mm]	l [mm]	J [mm]	G [mm]	E ₁ [mm]	E ₂ [°]	V	С	F	[kg/m]
	22	11	22	10.25	11.3	6.5	3	-	M4	-	M4	1.32
	28	13	28	12.25	15	7.5	1	-	M5	-	M5	2.02
ASN	35	17	35	16	15.8	10	2	-	M6	-	M6	3.05
	43	22	43	21	23	13.5	2.5	-	M8	-	M8	5.25
	63	29	63	28	29.3	10.5	-	2 x 45	-	M8	M8	10.30

DSS

DSS with one-sided extension (single stroke)

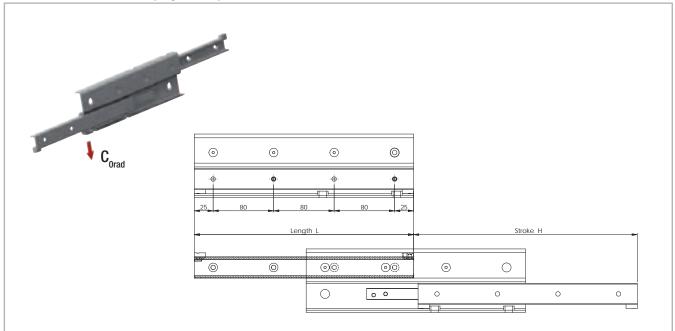


Fig. 12

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessi- ble holes / total
		290	296	570	3/4
		370	380	769	4/5
		450	464	969	4/6
		530	548	1170	6/7
		610	630	1376	6/8
	28	690	714	1577	7/9
		770	798	1778	7/10
DSS		850	864	2111	9/11
DSS		930	950	2240	9/12
		1010	1034	2054	10 / 13
		1090	1118	1896	10 / 14
		1170	1202	1761	12/15
		1250	1266	1695	12/16
		1330	1350	1586	13 / 17
		1410	1434	1490	13 / 18
		1490	1518	1405	15/19
					Tab. 5


Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessi- ble holes / total
		450	494	1250	5/6
		530	558	1685	6/7
		610	646	1908	6/8
		690	734	2132	7/9
		770	798	2579	8 / 10
		850	886	2801	9/11
		930	974	3024	9 / 12
		1010	1038	3476	10 / 13
DSS	35	1090	1126	3508	11 / 14
		1170	1214	3240	12 / 15
		1250	1278	3121	12 / 16
		1330	1366	2907	13 / 17
		1410	1454	2721	14 / 18
		1490	1518	2636	15 / 19
		1570	1606	2482	15 / 20
		1650	1694	2345	16 / 21
		1730	1758	2282	17 / 22

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessi- ble holes / total
		530	556	2061	6/7
		610	626	2603	6/8
		690	726	2775	7/9
		770	796	3319	7 / 10
		850	866	3873	9/11
		930	966	4036	9/12
		1010	1036	4590	10 / 13
		1090	1106	4908	11 / 14
	43	1170	1206	4610	12 / 15
DSS		1250	1276	4398	12 / 16
		1330	1376	4027	13 / 17
		1410	1446	3864	13 / 18
		1490	1516	3713	15 / 19
		1570	1616	3445	15 / 20
		1650	1686	3325	16 / 21
		1730	1756	3213	16 / 22
		1810	1856	3011	18 / 23
		1890	1926	2919	18 / 24
		1970	2026	2750	19 / 25

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessi- ble holes / total
		610	666	3502	6/8
		690	746	4252	8/9
		770	826	5012	8 / 10
		850	906	5780	9/11
		930	986	6552	9/12
		1010	1066	7329	11 / 13
		1090	1146	8109	11 / 14
		1170	1226	8892	12/15
DSS	63	1250	1306	9677	12/16
рээ	03	1330	1386	10464	14/17
		1410	1466	11252	14/18
		1490	1546	12041	15 / 19
		1570	1626	12832	15 / 20
		1650	1706	12364	17 / 21
		1730	1786	11827	17 / 22
		1810	1866	11334	18 / 23
		1890	1946	10881	18 / 24
		1970	2026	10463	20 / 25

DSS

DSS with one-sided extension (single stroke)

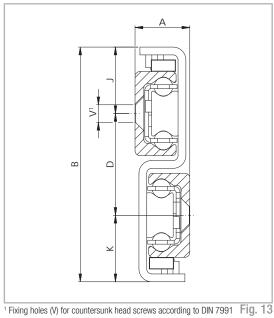

<u> </u>	

Туре	Size		Cross-section								
		A [mm]	B [mm]	K [mm]	D [mm]	J [mm]	V	[kg/m]			
	28	17	84	24,5	35	24,5	M5	6,40			
nee	35	22,5	104	30,5	43	30,5	M6	10,10			
DSS	43	28	120	34	52	34	M8	14,60			
	63	40	208	64	80	64	M10	32,60			

DSB

DSB with locking in extended state (blocking system)


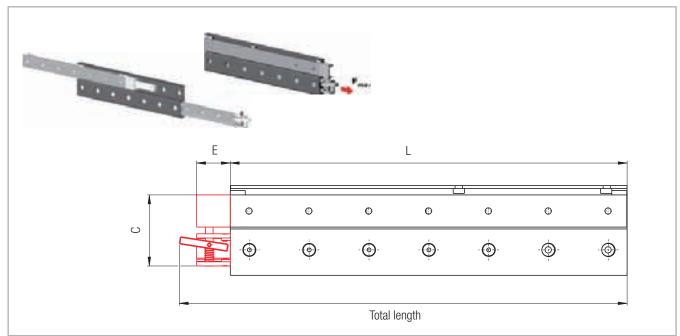


Fig. 14

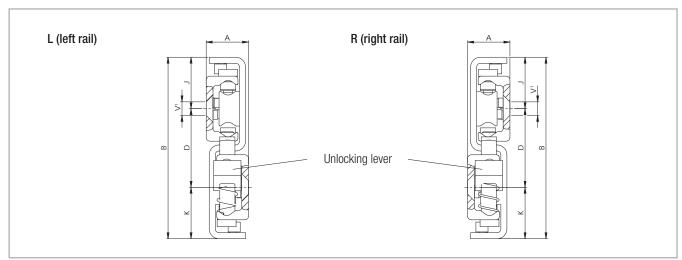

 $^{^{\}rm 1}$ Fixing holes (V) for countersunk head screws according to DIN 7991

Fig. 15

The DSB is built on the DSS design. The same load capacities, cross-sections and available rail lengths apply (see pg. TR-10ff). Data in Table 10 are based on the special features of the locking mechanism.

Please observe right or left installation for version DSB. The maximum load on the locking in the extension direction is indicated by ${\sf F}_{\sf max}$.

Туре	Size	L [mm]	Total length [mm]	C [mm]	E [mm]	F _{max} [N]	Weight [kg/m]
	28	from 290 to 1490*	L + 52	63	35	2460	6.51
DSB	35	from 450 to 1730*	L + 53	78	33	3000	10.4
	43	from 530 to 1970*	L + 69	95	45	5630	14.98

^{*} for available lengths, see pg. TR-10, tab. 5 and 7 (DSS)

DSD

DSD with double direction stroke (double stroke)

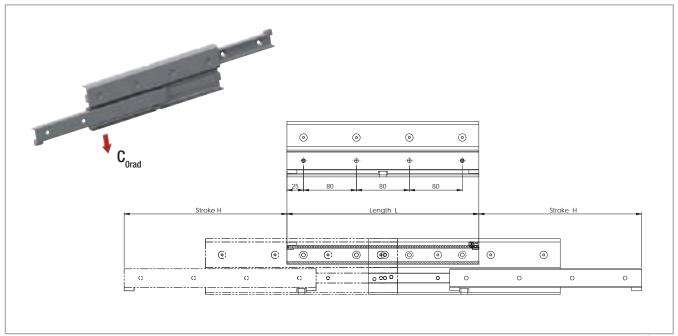


Fig. 16

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessi- ble holes / total
		290	246	895	4/4
		370	326	1105	4/5
		450	406	1317	6/6
		530	486	1626	6/7
		610	566	1837	8/8
		690	646	2050	8/9
		770	726	2262	10 / 10
DSD	28	850	806	2475	10/11
טטט		930	886	2581	12/12
		1010	966	2357	12/13
		1090	1046	2168	14/14
		1170	1126	2008	14/15
		1250	1206	1870	16/16
		1330	1286	1749	16 / 17
		1410	1366	1644	18 / 18
		1490	1446	1550	18/19
					Tab. 11

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessi- ble holes / total
		450	350	3025	4/6
		530	430	3191	6/7
		610	510	3381	6/8
		690	590	3800	8/9
		770	670	4008	8 / 10
		850	750	4223	10/11
		930	830	4646	10/12
		1010	910	4868	12/13
DSD	35	1090	990	4580	12/14
		1170	1070	4202	14/15
		1250	1150	3882	14/16
		1330	1230	3607	16 / 17
		1410	1310	3369	16 / 18
		1490	1390	3160	18/19
		1570	1470	2975	18 / 20
		1650	1550	2811	20 / 21
		1730	1630	2664	20 / 22


Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessi- ble holes / total
		530	476	3018	6/7
		610	556	3265	8/8
		690	636	3781	8/9
		770	716	4297	10/10
		850	796	4547	10/11
		930	876	5063	12/12
		1010	956	5578	12/13
		1090	1036	5830	14/14
		1170	1116	5392	14/15
DSD	43	1250	1196	5014	16/16
		1330	1276	4686	16 / 17
		1410	1356	4398	18 / 18
		1490	1436	4143	18 / 19
		1570	1516	3917	20 / 20
		1650	1596	3713	20 / 21
		1730	1676	3530	22 / 22
		1810	1756	3364	22 / 23
		1890	1836	3213	24 / 24
		1970	1916	3075	24 / 25
					Tab. 13

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{orad} [N]	Accessi- ble holes / total
		610	398	11858	6/8
		690	478	12242	6/9
		770	558	12717	8 / 10
		850	638	13250	8/11
		930	718	13823	10 / 12
		1010	798	14424	10 / 13
		1090	878	15046	12 / 14
		1170	958	15684	12/15
DSD	63	1250	1038	16334	14/16
טטט	03	1330	1118	16994	14/17
		1410	1198	17661	16 / 18
		1490	1278	18335	16/19
		1570	1358	19009	18 / 20
		1650	1438	17769	18 / 21
		1730	1518	16680	20 / 22
		1810	1598	15718	20 / 23
		1890	1678	14860	22 / 24
		1970	1758	14091	22 / 25

Weight

DSD

DSD with double direction stroke (double stroke)

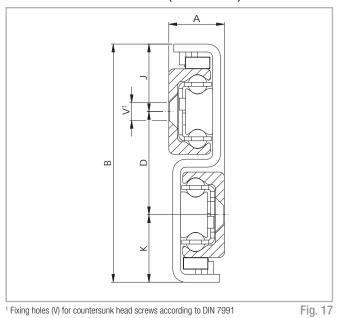

1	Fiving	holae	Λ۸	for	countersunk	head	ecrowe	according	tο	DIN	7001
	FIXILIA	110162	(V)	IUI	COULLELPRIN	Heau	SCIEWS	according	ιυ	אווע	1991

[kg/m] В K D ٧ [mm] [mm] [mm] [mm] [mm] 28 17 84 24,5 35 24,5 M5 6.40 22,5 104 30,5 43 10.10 35 30,5 M6 DSD 43 120 52 14.60 28 34 34 M8 63 40 208 80 64 32.60 64 M10 Tab. 15

Cross-section

Size

Type

DSC


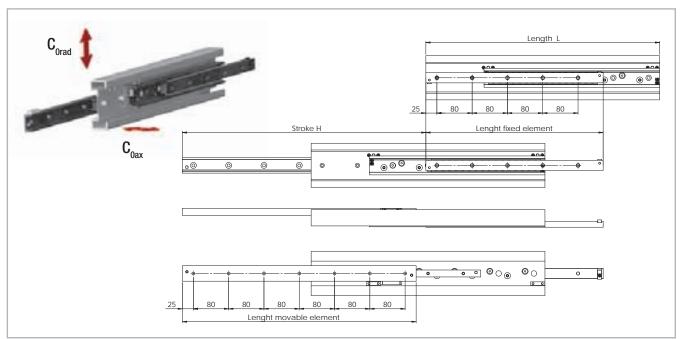


Fig. 18

Туре	Size	Length	Stroke	Load ca	pacities	Fixed eleme	nt	Movable elem	ent
		[mm]	H [mm]	C _{0rad} [N]	C _{oax} [N]	Accessible holes / total	Length [mm]	Accessible holes / total	Length [mm]
		530	552	2390	1673	5/5	402	6/7	530
		610	619	2964	2075	6/6	465	6/8	610
		690	725	3095	1920	6/6	520	8/9	690
		770	792	3666	1792	7/7	582	8/10	770
		850	859	4246	1681	8/8	644	9/11	850
		930	965	4369	1459	9/9	700	9/12	930
		1010	1029	5254	1392	10 / 10	770	11 / 13	1010
		1090	1099	5529	1317	10 / 10	825	11 / 14	1090
		1170	1202	5177	1182	11 / 11	887	12 / 15	1170
DSC	43	1250	1272	4937	1127	12 / 12	942	12 / 16	1250
		1330	1375	4499	1027	13 / 13	1005	14 / 17	1330
		1410	1445	4317	986	14 / 14	1060	14 / 18	1410
		1490	1509	4181	955	14 / 14	1130	15 / 19	1490
		1570	1615	3849	879	15 / 15	1185	16 / 20	1570
		1650	1685	3714	848	15 / 15	1240	16 / 21	1650
		1730	1752	3601	822	16 / 16	1302	17 / 22	1730
		1810	1843	3406	778	17 / 17	1365	18 / 23	1810
		1890	1922	3270	747	18 / 18	1427	19 / 24	1890
		1970	2028	3063	699	19 / 19	1482	20 / 25	1970

DSC

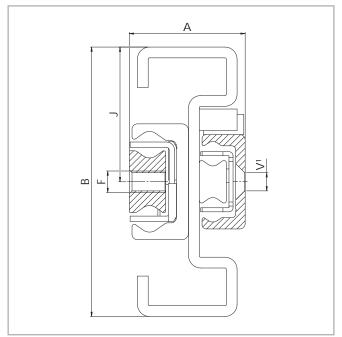


¹ Fixing holes (V) for countersunk head screws according to DIN 7991

Abb. 19

Туре	Size		Cross-section								
		A [mm]	B [mm]	J [mm]	F [mm]	V¹ [mm]	[kg/m]				
DSC	43	43	100	50	M8	M6	13.4				

Tab. 17

> DE

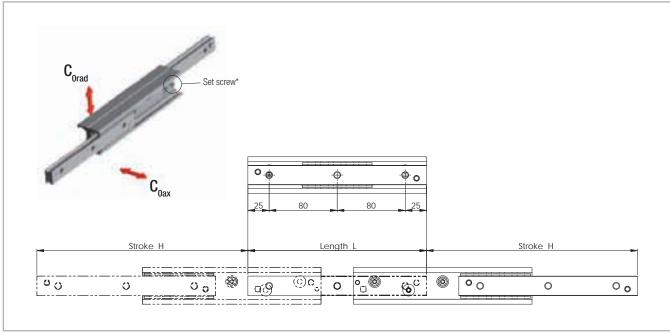

^{*} Remove the set screw to reach all the fixing holes. See also assembly instructions on page TR-39f.

Fig. 20

There are three options for mounting holes available for

the DE series in sizes 22 to 43:

Version DEF with threaded holes,

Version DEV with counter-sunk holes,

Version DEM, both variants (mixed) (see fig. 21).

Size 63 is only available with threaded holes.

Туре	Size	Length	Stroke Load cap		pacities	No. of
		[mm]	m [mm]	C _{Orad} [N]	C _{0ax} [N]	holes
		130	152	119	83	2
		210	222	281	196	3
		290	308	390	273	4
DEF		370	392	501	263	5
DEV	22	450	462	674	230	6
DEM		530	548	571	193	7
		610	632	494	167	8
		690	702	453	153	9
		770	788	401	135	10
						Tab. 18


Туре	Size	Length	Stroke	Load ca	pacities	No. of
		[mm]	H [mm]	C _{0rad} [N]	C _{0ax} [N]	holes
		130	148	235	164	2
		210	232	432	302	3
		290	296	767	537	4
		370	380	968	471	5
		450	464	1169	385	6
		530	548	1107	325	7
DEF DEV	28	610	633	955	280	8
DEM	20	690	717	842	247	9
		770	801	753	221	10
		850	866	710	208	11
		930	950	646	189	12
		1010	1034	592	174	13
		1090	1118	547	160	14
		1170	1202	508	149	15
						Tab. 19

Туре	Size	Length	Stroke	Load capacities		No. of
		[mm]	H [mm]	C _{Orad} [N]	C _{0ax} [N]	holes
		210	254	402	281	3
		290	318	800	560	4
		370	406	1025	718	5
		450	494	1250	793	6
		530	558	1685	728	7
		610	646	1908	626	8
		690	734	1689	548	9
DEF		770	798	1591	516	10
DEV	35	850	886	1425	463	11
DEM		930	974	1291	419	12
		1010	1038	1233	400	13
		1090	1126	1131	367	14
		1170	1214	1045	339	15
		1250	1278	1006	327	16
	1330	1366	937	304	17	
		1410	1454	877	285	18
		1490	1518	850	276	19
						Tab. 20

Туре	Size	Length	Stroke	Load ca	pacities	No. of
		[mm]	H [mm]	C _{Orad} [N]	C _{oax} [N]	holes
		610	666	4090	2863	8
		690	746	4859	3062	9
		770	826	5635	2784	10
		850	906	6415	2553	11
		930	986	7198	2357	12
		1010	1066	6885	2189	13
		1090	1146	6427	2043	14
		1170	1226	6026	1916	15
DEF	63	1250	1306	5672	1803	16
DEL	03	1330	1386	5357	1703	17
		1410	1466	5076	1614	18
		1490	1546	4822	1533	19
		1570	1626	4593	1460	20
		1650	1706	4384	1394	21
		1730	1786	4194	1333	22
		1810	1866	4019	1278	23
		1890	1946	3859	1227	24
		1970	2026	3710	1180	25
						Tab. 22

Туре	Size	Length	Stroke	Load ca	pacities	No. of
		[mm]	H [mm]	C _{Orad} [N]	C _{0ax} [N]	holes
		210	246	605	424	3
		290	316	1114	780	4
		370	416	1300	910	5
		450	486	1828	1279	6
		530	556	2375	1434	7
		610	626	2934	1300	8
		690	726	3091	1096	9
		770	796	3055	1016	10
		850	866	2847	946	11
		930	966	2506	833	12
DEF		1010	1036	2364	786	13
DEV	43	1090	1106	2238	744	14
DEM		1170	1206	2022	672	15
		1250	1276	1928	641	16
		1330	1376	1766	587	17
		1410	1446	1694	563	18
		1490	1516	1628	541	19
		1570	1586	1567	521	20
		1650	1686	1458	485	21
		1730	1756	1409	468	22
		1810	1856	1320	439	23
		1890	1926	1280	425	24
		1970	2026	1206	401	25

DE

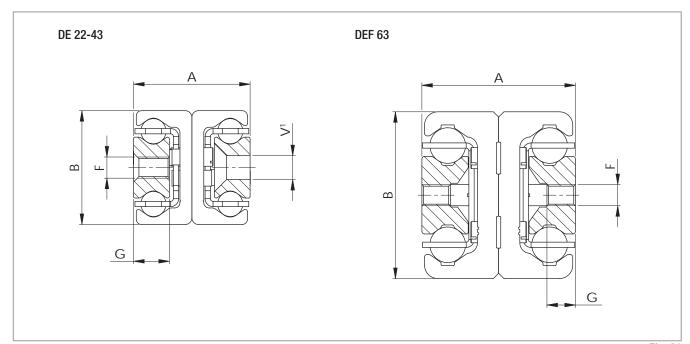

¹ Fixing holes (V) for countersunk head screws according to DIN 7991

Fig. 21

Туре	Size		Cross-section						
		A [mm]	B [mm]	G [mm]	F	V	[kg/m]		
	22	22	22	6.5	M4	M4	2.64		
DEF	28	26	28	7.5	M5	M5	4.04		
DEV	35	34	35	10	M6	M6	6.10		
DEM	43	44	43	13.5	M8	M8	10.50		
	63	58	63	10.5	M8	-	20.60		

Tab. 23

DED

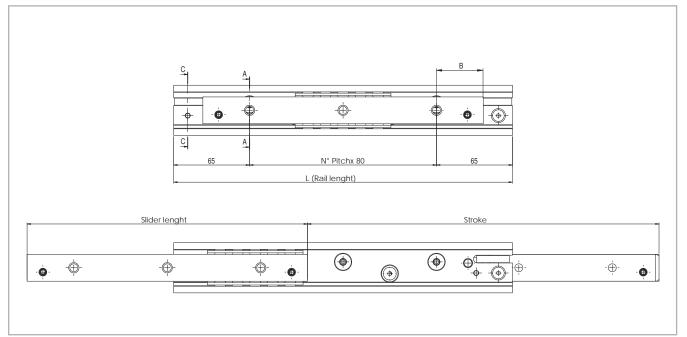


Abb. 22

Туре	Size	Length	Stroke	Load ca	pacities	Slider	В	No. of
		[mm]	H [mm]	C _{0rad} [N]	C _{0ax} [N]	[mm]	[mm]	holes
		290	292	418	293	250	45	3
		370	376	612	428	330	45	4
		450	460	809	391	410	45	5
		530	544	1007	329	490	45	6
		610	628	970	285	570	45	7
DED	28	690	712	853	250	650	45	8
חבח	20	770	796	762	224	730	45	9
		850	880	688	202	810	45	10
		930	964	628	184	890	45	11
		1010	1048	577	169	970	45	12
		1090	1132	534	157	1050	45	13
		1170	1216	496	146	1130	45	14


Tab. 24

Туре	Size	Length	Stroke H	Load ca	pacities	Slider [mm]	B [mm]	No. of holes
		[mm]	[mm]	C _{Orad} [N]	C _{0ax} [N]	[iiiiii]	[]	110163
		290	303	445	312	250	45	3
		370	391	661	463	330	45	4
		450	479	880	616	410	45	5
		530	543	1281	767	490	45	6
		610	631	1506	654	570	45	7
		690	719	1730	570	650	45	8
		770	783	1651	536	730	45	9
DED	25	850	871	1473	478	810	45	10
DED	35	930	959	1330	432	890	45	11
		1010	1023	1268	412	970	45	12
		1090	1111	1161	377	1050	45	13
		1170	1199	1070	347	1130	45	14
		1250	1263	1030	334	1210	45	15
		1330	1351	958	311	1290	45	16
		1410	1439	895	291	1370	45	17
		1490	1503	867	281	1450	45	18

Туре	Size	Length	Stroke	Load ca	pacities	Slider	В	No. of	
		L H [mm] [mm]	C _{0rad} [N]	C _{0ax} [N]	[mm]	[mm]	holes		
			290	301	501	351	240	40	3
		370	401	700	490	320	40	4	
		450	471	1159	811	400	40	5	
		530	541	1656	1159	480	40	6	
		610	641	1848	1242	560	40	7	
		690	711	2362	1140	640	40	8	
		770	781	2892	1054	720	40	9	
		850	881	2753	915	800	40	10	
		930	951	2583	859	880	40	11	
		1010	1021	2433	809	960	40	12	
DED	40	1090	1121	2180	725	1040	40	13	
DED	43	1170	1191	2072	689	1120	40	14	
		1250	1261	1974	656	1200	40	15	
		1330	1361	1804	600	1280	40	16	
		1410	1431	1729	575	1360	40	17	
		1490	1501	1661	552	1440	40	18	
		1570	1601	1538	512	1520	40	19	
		1650	1671	1484	493	1600	40	20	
		1730	1741	1433	476	1680	40	21	
		1810	1841	1341	446	1760	40	22	
		1890	1911	1300	432	1840	40	23	
		1970	2011	1224	407	1920	40	24	

DED version D

DED with double direction stroke (double stroke)

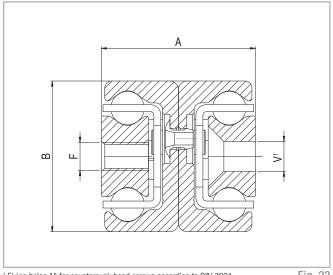


 $^{\mbox{\tiny 1}}$ Fixing holes (V) for countersunk head screws according to DIN 7991

Fig. 23

Туре	Size		Weight			
		A [mm]	B [mm]	F	V	[kg/m]
	28	26	28	M5	M5	4,04
DED	35	34	35	M6	M6	6,10
	43	44	43	M8	M8	10,50

DBN

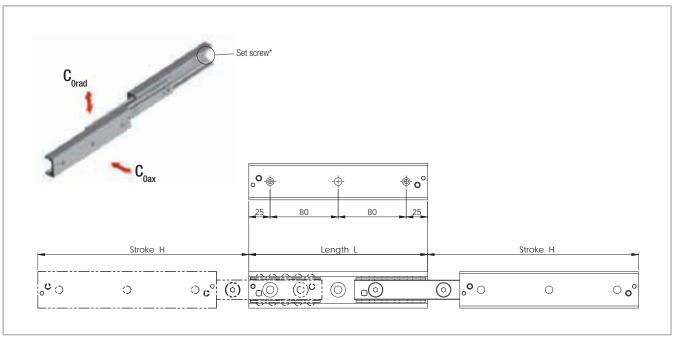

* Remove the set screw to reach all the fixing holes. See also assembly instructions on page TR-39f.

Fig. 24

Туре	Size	Length	Stroke	Load ca	pacities	No. of holes
		[mm]	H [mm]	C _{Orad} [N]	C _{0ax} [N]	
		130	152	119	83	2
		210	222	281	196	3
		290	308	236	236	4
		370	392	186	186	5
DBN	22	450	462	162	162	6
		530	548	136	136	7
		610	632	117	117	8
		690	702	108	108	9
		770	788	95	95	10

┰-		00	١
IΩ	n	-75	


	Length	Stroke H	Load ca	No. of		
		m [mm]	C _{Orad} [N]	C _{0ax} [N]	holes	
	130	148	235	164	2	
	210	232	432	302	3	
	290	296	622	537	4	
	370	380	482	482	5	
	450	464	393	393	6	
	530	548	332	332	7	
20	20	610	633	286	286	8
20	690	717	252	252	9	
	770	801	226	226	10	
	850	866	213	213	11	
	930	950	194	194	12	
	1010	1034	178	178	13	
	1090	1118	164	164	14	
	1170	1202	152	152	15	
	28	210 290 370 450 530 610 690 770 850 930 1010 1090	130 148 210 232 290 296 370 380 450 464 530 548 610 633 690 717 770 801 850 866 930 950 1010 1034 1090 1118	130 148 235 210 232 432 290 296 622 370 380 482 450 464 393 530 548 332 610 633 286 690 717 252 770 801 226 850 866 213 930 950 194 1010 1034 178 1090 1118 164	130 148 235 164 210 232 432 302 290 296 622 537 370 380 482 482 450 464 393 393 530 548 332 332 610 633 286 286 690 717 252 252 770 801 226 226 850 866 213 213 930 950 194 194 1010 1034 178 178 1090 1118 164 164	

Туре	Size	Length	Stroke	Load capacities		No. of
		[mm]	H [mm]	C _{0rad} [N]	C _{0ax} [N]	holes
		210	254	402	281	3
		290	318	667	560	4
		370	406	522	522	5
		450	494	429	429	6
		530	558	394	394	7
	DBN 35	610	646	338	338	8
		690	734	297	297	9
		770	798	279	279	10
DBN		850	886	250	250	11
		930	974	227	227	12
		1010	1038	217	217	13
		1090	1126	199	199	14
	1170	1214	183	183	15	
	1250	1278	177	177	16	
	1330	1366	165	165	17	
		1410	1454	154	154	18
		1490	1518	149	149	19

19	
Tab.	30

Туре	Size	Length	Stroke	Load ca	pacities	No. of
	[mm]		H [mm]	C _{0rad} [N]	C _{0ax} [N]	holes
		210	246	605	424	3
		290	316	1114	780	4
		370	416	1300	910	5
		450	486	1331	1279	6
		530	556	1193	1193	7
		610	626	1082	1082	8
		690	726	912	912	9
	770	796	845	845	10	
	850	866	788	788	11	
	DBN 43	930	966	693	693	12
		1010	1036	654	654	13
DBN		1090	1106	619	619	14
		1170	1206	559	559	15
		1250	1276	533	533	16
		1330	1376	488	488	17
		1410	1446	469	469	18
		1490	1516	450	450	19
		1570	1586	434	434	20
		1650	1686	403	403	21
		1730	1756	390	390	22
		1810	1856	365	365	23
		1890	1926	354	354	24
		1970	2026	334	334	25

DBN

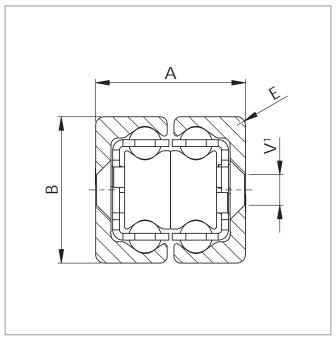

¹ Fixing holes (V) for countersunk head screws according to DIN 7991

Fig. 25

Туре	Size		Weight [kg/m]				
		A [mm]			V	[kg/III]	
	22	22	22	3	M4	2.64	
DBN	28	26	28	1	M5	4.04	
DDIN	35	34	35	2	M6	6.10	
	43	44	43	2.5	M8	10.50	

Tab. 32

DMS


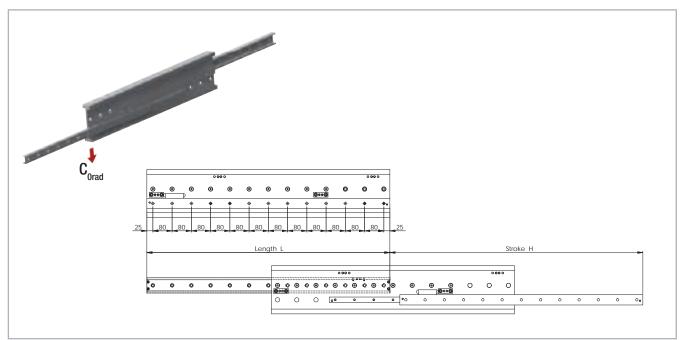


Fig. 26

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Fixed element Accessible holes / total	Movable element Accessible holes / total
		1010	1051	8052	10 / 13	10 / 13
		1090	1141	8748	10 / 14	11 / 14
		1170	1216	9584	11 / 15	11 / 15
		1250	1291	10424	12 / 16	13 / 16
		1330	1381	11119	13 / 17	13 / 17
		1410	1456	11960	13 / 18	14 / 18
		1490	1531	12804	14 / 19	14 / 19
DMC	DMS 63	1570	1621	13498	14 / 20	15 / 20
DIVIO	03	1650	1696	14343	16 / 21	16 / 21
		1730	1771	15190	16 / 22	17 / 22
		1810	1861	15883	17 / 23	17 / 23
		1890	1936	16730	18 / 24	19 / 24
		1970	2026	17423	19 / 25	19 / 25
		2050	2101	18271	19 / 26	20 / 26
		2130	2176	19120	20 / 27	20 / 27
		2210	2266	19812	21 / 28	22 / 28

DMS

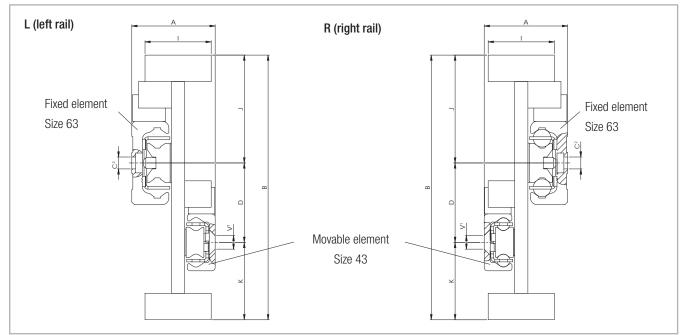

¹ Fixing holes (V) for countersunk head screws according to DIN 7991
² Fixing holes (C) for socket cap screws according to DIN 7984. Alternative fixing with Torx® screws in special design with low head (on request)

Fig. 27

Size	Cross-section							Weight	
	A [mm]	B [mm]	l [mm]	K [mm]	D [mm]	J [mm]	С	V	[kg/m]
63	63	200	50	58.5	60	81.5	M8	M8	43
		A [mm]	A B [mm]	A B I [mm] [mm]	A B I K [mm] [mm]	A B I K D [mm] [mm] [mm]	A B I K D J [mm] [mm] [mm]	A B I K D J C [mm] [mm] [mm] [mm]	A B I K D J C V [mm] [mm] [mm] [mm]

DRT


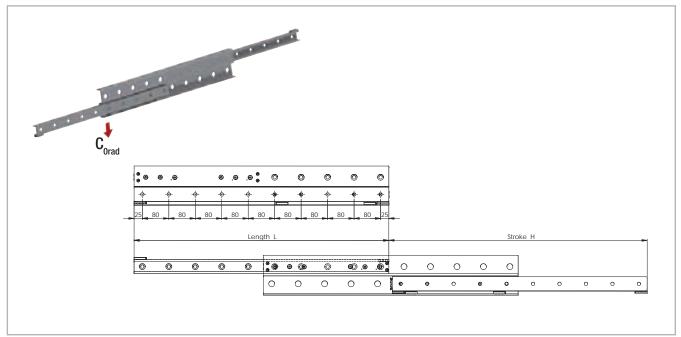


Fig. 28

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity C _{Orad} [N]	Accessible holes / total
		770	780	2385	10 / 10
		850	860	2460	10 / 11
		930	940	2520	12 / 12
		1010	1020	2575	12 / 13
		1090	1100	2620	14 / 14
		1170	1180	2660	14 / 15
		1250	1260	2690	16 / 16
DDT	40	1330	1340	2720	16 / 17
DRT	43	1410	1420	2745	18 / 18
		1490	1500	2770	18 / 19
		1570	1580	2790	20 / 20
		1650	1660	2805	20 / 21
		1730	1740	2825	22 / 22
		1810	1820	2840	22 / 23
		1890	1900	2850	24 / 24
		1970	1980	2860	24 / 25

Tab. 35

DRT

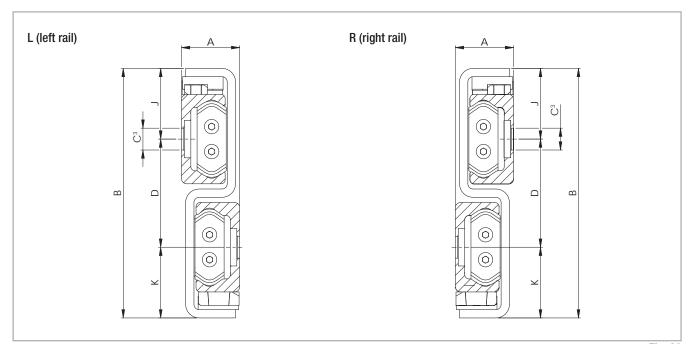

 $^{^{\}rm 3}$ Fixing holes for Torx $^{\rm @}$ screws in custom design with load head (included in scope of supply)

Fig. 29

Туре	Size		Cross-section					
		A [mm]	B [mm]	K [mm]	D [mm]	J [mm]	С	[kg/m]
DRT	43	29	120	34	52	34	M8	11.20

Tab. 36

Technical instructions



Telescopic rail selection

Selecting the suitable telescopic rail should be done based on the load and the maximum permissible deflection in the extended state. The load capacity of a telescopic rail depends on two factors: the loading capacity of the ballcage and the rigidity of the intermediate element. For mainly short strokes the load capacity is determined by the load-bearing capacity of the ballcage; for average and long strokes it is determined by the rigidity of the intermediate element. Therefore series, which otherwise contain comparable components, are also suited for differing load capacities.

Static load check

The values in the load capacity tables of the corresponding series (see Sect. 3, Product Dimensions, pg. TR-6ff) give the maximum permissible loading of a telescopic rail in the centre of the movable rail in the completely extended state.

All load capacity data is based on a telescopic rail.

Typically, a pair of rails is used and the loading acts in the centre on both rails (see fig. 31, P.).

In this case, the load capacity of a rail pair is:

$$P_1 = 2 \cdot C_{0rad}$$



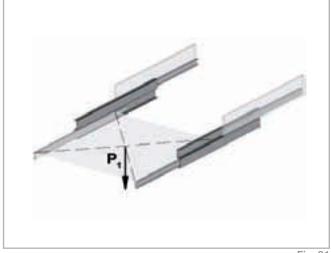


Fig. 31

Deflection

If the load P acts vertically on the rail (see fig. 34), the expected elastic deflection of the individual telescopic rail in the extended state can be determined as follows:

$$f = \frac{q}{t} \cdot P$$
 (mm)

Fig. 32

Whereby:

- f is the expected elastic deflection in mm
- q is a stroke coefficient (see fig. 35)
- t is a factor depending on the model of the telescopic rail (see fig. 33)
- P is the actual load acting on the centre of a rail, in N

Also refer to page TR-32 for checking the static load


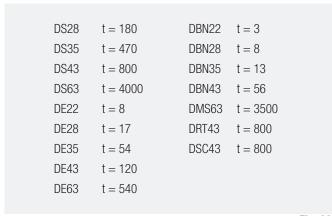


Fig. 33



Important:

With the partial extensions of the ASN series, the deflection is almost completely determined by the rigidity, i.e. by the moment of inertia of the adjacent construction.

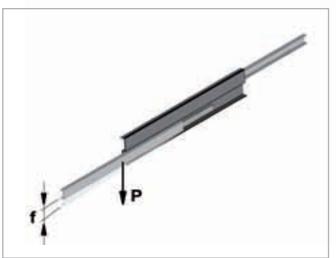


Fig. 34

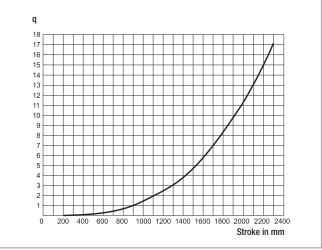


Fig. 35

Static load

The telescopic extension of the various series accept different forces and moments (see Sect. 3, Product dimensions, pg. TR-6ff).

During the static tests the radial load capacity, C_{0rad} , the axial load capacity, C_{0ax} , and moments M_{x^*} , M_y and M_z indicate the maximum permissible values of the loads; higher loads negatively effect the running properties

and the mechanical strength. A safety factor, S_0 , is used to check the static load, which takes into account the basic parameters of the application and is defined in more detail in the following table:

Safety factor S₀

Neither shocks nor vibrations, smooth and low-frequency reverse, high assembly accuracy, no elastic deformations	1 - 1.5
Normal installation conditions	1.5 - 2
Shocks and vibrations, high-frequency reverse, significant elastic deformation	2 - 3.5

Tab. 37

The ratio of the actual load to maximum permissible load may be as large as the reciprocal of the accepted safety factor, S_n , at the most.

$$\frac{P_{\text{0rad}}}{C_{\text{0rad}}} \leq \frac{1}{S_0}$$

$$\frac{P_{0ax}}{C_{0ax}} \le \frac{1}{S_0}$$

$$\frac{M_1}{M_x} \le \frac{1}{S_0}$$

$$\frac{M_2}{M_y} \leq \frac{1}{S_0}$$

$$\frac{M_3}{M_z} \le \frac{1}{S_0}$$

Fig. 36

The above formulas are valid for a single load case. If two or more of the described forces act simultaneously, the following check must be made:

$$\frac{P_{\text{Orad}}}{C_{\text{Orad}}} + \frac{P_{\text{Oax}}}{C_{\text{Oax}}} + \frac{M_{1}}{M_{x}} + \frac{M_{2}}{M_{v}} + \frac{M_{3}}{M_{z}} \leq \frac{1}{S_{0}}$$

P_{0rad} = effective radial load

 C_{0rad} = permissible radial load

 P_{0ax} = effective axial load

 C_{nax} = permissible axial load

 M_{1} = effective moment in the x-direction

 M_{ν} = permissible moment in the x-direction

 M_2 = effective moment in the y-direction

 M_v = permissible moment in the y-direction

M₃ = effective moment in the z-direction

3

 M_{z} = permissible moment in the z-direction

Fig. 37

Service life

The service life is defined as the time span between commissioning and the first sign of fatigue or wear indications on the raceways. The service life of a telescopic rail is dependent on several factors, such as the effective load, the installation precision, occurring shocks and vibrations, the operating temperature, the ambient conditions and the lubrication. Calculation of the service life is based exclusively on the loaded rows of balls.

In practice, the decommissioning of the bearing, due to its destruction or extreme wear of a component, represents the end of service life.

This is taken into account by an application coefficient (f_i in the formula below), so the service life consists of:

$$L_{km} = 100 \cdot (\frac{\delta}{W} \cdot \frac{1}{f_i})^3$$

 $L_{\rm km} = {\rm calculated}$ service life in km

 δ = load capacity factor in N

W = equivalent load in N

f; = application coefficient

Fig. 38

Application coefficient f

	ASN, DS, DE, DBN, DRT, DSC
Neither shocks nor vibrations, smooth and low-frequency direction change, clean environment	1.3 - 1.8
Light vibrations and average direction change	1.8 - 2.3
Shocks and vibrations, high-frequency direction change, very dirty environment	2.3 - 3.5

Tab. 38

If the external load, P, is the same as the dynamic load capacity, C_{orad} , (which of course must never be exceeded), the service life at ideal operating conditions (f_i=1) amounts to 100 km.

Naturally, for a single load P, the following applies: W= P. If several external loads occur simultaneously, the equivalent load is calculated as follows:

$$W = P_{\text{rad}} + (\frac{P_{\text{ax}}}{C_{\text{0ax}}} + \frac{M_{_1}}{M_{_X}} + \frac{M_{_2}}{M_{_V}} + \frac{M_{_3}}{M_{_z}}) \cdot C_{\text{0rad}}$$

Fig. 39

Load capacity factor $\boldsymbol{\delta}$

Length			ASN		
[mm]	22 28 35		35	43	63
			δ [N]		
130	415	872			
210	932	1577	1533	2288	
290	1295	2692	2906	4055	
370	1665	3405	3721	4794	
450	2205	4119	4537	6602	
530	2567	4832	5990	8451	
610	2936	5557	6803	10325	15003
690	3480	6271	7617	11005	17708
770	3842	6984	9093	12877	20427
850		8111	9903	14762	23155
930		8811	10714	15429	25889
1010		9524	12201	17310	28629
1090		10237	13009	17981	31374
1170		10950	13818	19860	34121
1250			15311	21747	36871
1330			16118	22411	39623
1410			16925	24295	42377
1490			18423	26186	45133
1570				28083	47890
1650				28733	50648
1730				30626	53407
1810				31281	56166
1890				33172	58927
1970				33829	61688

Length		D	S		DSC
[mm]	28	35	43	63	43
			δ [N]		
290	863				
370	1164				
450	1466	1892			
530	1768	2540	3120		3597
610	2078	2878	3929	5328	4451
690	2381	3217	4197	6459	4661
770	2684	3881	5010	7604	5511
850	3180	4218	5836	8759	6373
930	3474	4555	6090	9921	6572
1010	3778	5226	6916	11089	7880
1090	4081	5561	7750	12261	8296
1170	4384	5897	7646	13437	8934
1250	4896	6573	8829	14616	9351
1330	5193	6907	9077	15798	9990
1410	5496	7242	9909	16981	10409
1490	5806	7920	10746	18166	11728
1570		8253	10988	19353	11913
1650		8588	11825	20540	12330
1730		9268	12665	21729	13197
1810			12904	22919	13912
1890			13743	24109	14704
1970			13983	25301	14885
					Tab. 40

Tab. 39

Length	DRT	DMS
[mm]	43	63
		5 V]
770	5160	
850	5306	
930	5424	
1010	5522	12154
1090	5605	14987
1170	5675	14457
1250	5736	16486
1330	5789	16763
1410	5836	19842
1490	5878	19285
1570	5915	22158
1650	5948	21598
1730	5978	24707
1810	6005	23911
1890	6030	25963
1970	6053	26225
2050		29341
2130		28763
2210		30595

Tab. 41

Length		DE	/ DBN		DE
[mm]	22	28	35	43	63
			δ [N]		
130	165	357	141		
210	386	655	614	923	
290	537	1153	1211	1687	
370	690	1456	1552	1974	
450	925	1759	1892	2764	
530	1075	2063	2540	3580	
610	1229	2372	2878	4414	6203
690	1467	2675	3217	4661	7361
770	1616	2979	3881	5493	8527
850	1010	3487	4218	6335	9699
930		3783	4555	6572	10875
1010		4086	5226	7411	12055
1090		4388	5561	8257	13238
1170		4691	5897	8489	14423
1250		1001	6573	9332	15610
1330			6907	9568	16798
1410			7242	10409	17987
1490			7920	11255	19178
1570			7 0 2 0	12105	20369
1650				12330	21561
1730				13178	22754
1810				13406	23948
1890				14252	25142
1970				14483	26336
1070				1 1 100	20000

Tab. 42

Speed

The maximum operating speed is determined by the mass of the intermediate element, which moves with the movable rail. This reduces the maximum permissible operating speed with increasing length (see fig. 40).

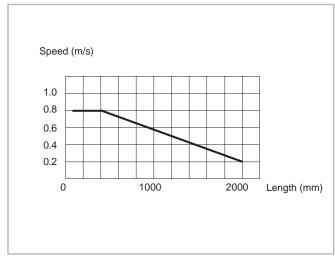


Fig. 40

Opening and closing force

The required actuation forces of a telescopic rail depend on the acting load and the deflexion in the extended state. The force required for opening is principally determined by the coefficient of friction of the linear bearing. With correct assembly and lubrication, this is 0.01. During the extension, the force is reduced with the elastic deflection of the loaded

telescopic rail. A higher force is required to close a telescopic extension, since, based on the elastic deflection, even if it is minimal, the movable rail must move against an inclined plane.

Double-sided stroke

For all designs allowing double-sided stroke, it must be noted that the position of the intermediate element is defined only in the extended state. In the extended state, the intermediate element can protrude by half of its length on each side. Exception is the ASN series, which comes out as a partial extension without an intermediate element and the custom design of series DE with driving disc.

The double-sided stroke in the ASN, DE and DBN series is achieved by removing the set screw. For the DSD series, the double-sided stroke is implemented by design adaptation. Double-sided stroke for series DMS on request. The DSB and DRT series are not available with double-sided stroke.

Temperature

- Series ASN, DE, DBN can be used up to an ambient temperature of +170 °C (+338 °F). A lithium lubricant for high operating temperatures is recommended for temperatures above +130 °C (+266 °F).
- The DS, DSC, and DRT series have a useable range of -30 °C to +110 °C (-22 °F to +230 °F) because of the rubber stop.

Anticorrosive protection


- All of our Telescopic Rail series have a standard anticorrosive protection by electrolytic galvanisation according to ISO 2081. If increased anticorrosive protection is required, the rails are available chemically nickel plated and with corrosion resistant steel balls.
- Numerous application-specific surface treatments are available upon request, e.g., a nickel-plated design with FDA approval for use in the food industry.

For more information please contact Rollon technical support.

Lubrication

- Recommended lubrication intervals are heavily dependent upon the ambient conditions, speed and temperature. Under normal conditions, lubrication is recommended after 100 km operational performance or after an operating period of six months. In critical application cases the interval should be shorter. Please clean the raceways carefully before lubricating. Raceways and spaces of the ball cage are lubricated with a lithium lubricant of average consistency (roller bearing lubricant).
- Different lubricants for special applications are available upon request.
 Example: Lubricant with FDA approval for use in the food industry.
 For more information please contact Rollon technical support.

Fixing screws

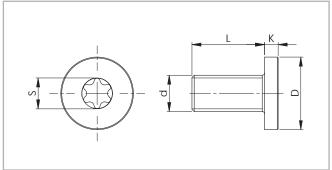

The DRT 43 telescopic rail must be fixed with a custom designed Torx® screws with low cap head. The screws are included in the scope of supply. All other rails are fixed with counter-sunk or cap head screws as per DIN 7991 or 7984. In size 63 of the ASN and DMS series, Torx® screws with low head cap screws are available on request (see fig. 41).

Fig. 41

Size	Screw type	d	D [mm]	L [mm]	K [mm]	S
63	M8 x 20	M8 x 1.25	13	20	5	T40
43	M8 x 16	M8 x 1.25	16	16	3	140

Tab. 43

Tightening torques of the standard fixing screws to be used

Property class	Size	Tightening torque [Nm]
10.9	22	4.3
	28	8.5
	35	14.6
	43	34.7
	63	34.7

Tab. 44

Tab. 45

Prepare a sufficient bevel on the threaded fixing holes, according to the following table:

Size	Bevel (mm)
22	0,5 x 45°
28	1 x 45°
35	1 x 45°
43	1 x 45°
63	1 x 45°


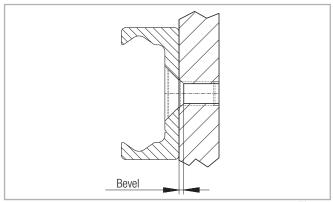


Fig. 42

Installation instructions

In general and for ASN, DE, DBN, DS, DMS, DRT

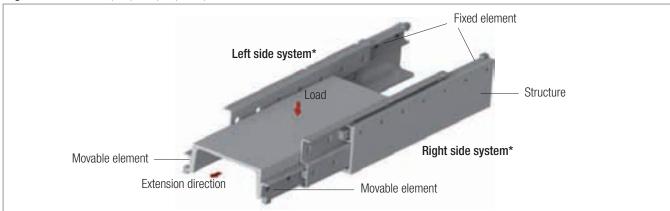

* For models DSB, DMS and DRT, please observe right or left side use

Fig. 43

General

- Internal stops are used to stop the unloaded slider and the ball cage.
 Please use external stops as end stops for a loaded system.
- To achieve optimum running properties, high service life and rigidity, it is necessary to fix the telescopic rails with all accessible holes on a rigid and level surface.
- In order to reach all mounting holes for the ASN, DEV, DEM and DBN series it is necessary to remove the locking screw in the rail during assembly and then to reinsert it afterwards.
- When using two telescopic rails, please observe the parallelism of the installation surfaces. The fixed and movable rails fit to the rigid assembly construction.
- Telescopic Rail guides are suitable for continuous use in automatic systems. For this, the stroke should remain constant in all moving cycles and the operating speed must be checked (see pg. TR-36, fig. 40). The movement of the telescopic rails is enabled by internal ballcages, which could experience an offset from the original position with differing strokes. This phase offset can have a negative effect on the running properties or limit the stroke. If differing strokes occur in an application, the drive force must be sufficiently dimensioned in order to appropriately synchronise the ballcage offset. Otherwise, an additional maximum stroke must be planned regularly to ensure the correct position of the ballcage.

ASN

- Series ASN accepts radial and axial loads and moments in all principle directions.
- Horizontal and vertical application is possible. Prior to vertical installation, we recommend contacting Rollon technical support.
- The installation of two partial extensions on a profile provides a load capable full extension. For individual solutions, please contact Rollon technical support.

DE / DBN

- Series DE and DBN accept radial and axial loads.
- Horizontal and vertical application is possible. Prior to vertical installation, we recommend you contact Rollon technical support.
- The functionality of custom design DE...D is only guaranteed if the stroke available is completely used.

DS / DMS / DRT

- Series DS, DMS and DRT accept radial loads. This should act in the vertical cross-sectional axis on the movable rails.
- Horizontal and vertical application is possible. Prior to vertical installation, we recommend you contact Rollon technical support.
- When installing make sure that the load is placed on the movable element (the lower rail) (see fig. 43).
 - The opposite assembly negatively affects the function.
- Installation must be done on a rigid structure using all accessible fixing holes.
- Pay attention to the parallel alignment during assembly with paired application.

Installation instructions

For DSC

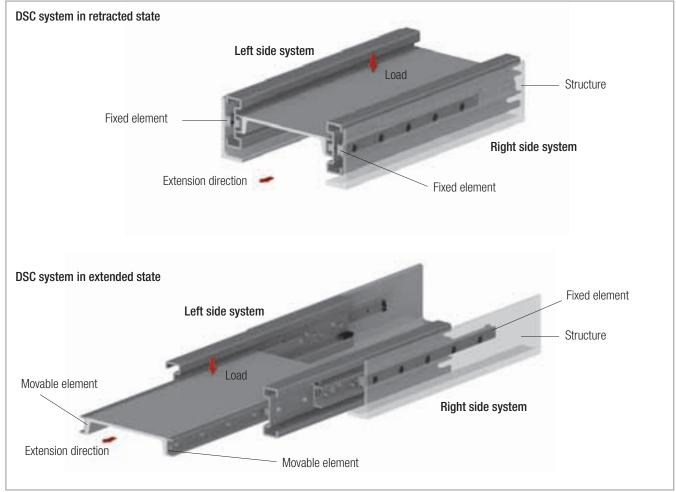



Fig. 44

DSC

- The DSC series absorbs radial and axial loads, in which case radial load directions are preferable.
- Horizontal and vertical use is possible. Prior to vertical installation we recommend inspection by the application engineers.
- During installation make sure that the load is mounted on the movable element (see Fig. 44). Reverse installation will impair proper functioning.
- The installation must be performed on a rigid structure, using all accessible mounting holes.
- Important: The length of the slider (fixed element) is different from the system length. See Table 16 on page TR-16 for DSC load ratings. The table also provides information on the accessible mounting holes.
- Important: The slide (fixed element) must be mounted in the front position when the system is retracted in order to achieve the entire stroke.
- If used in pairs, make sure the elements are aligned parallel during mounting.

Ordering key / ~

Telescopic rails

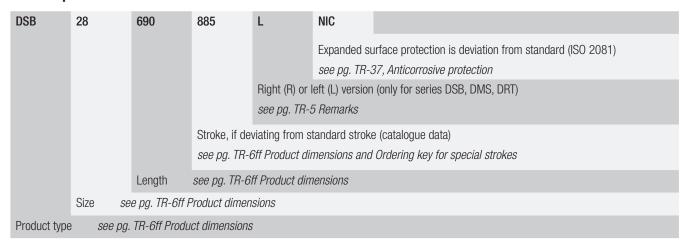

Ordering example 1: ASN35-0770

Ordering example 2: DSB28-0690-0885-L-NIC Ordering example 3 (rail DE...D): DEF28D0690

Notes on ordering: Information for right and left side installation and for expanded surface protection is only necessary if required.

Rail lengths and strokes are always stated with 4 digits. Please use zeroes to fill in for lengths with less than 4 digits

Special strokes

Special strokes are defined as deviations from standard stroke H. They are each available as multiples of the values in tab. 46 and 47. These values are dependent on the spacing of the ballcage.

Туре	Size	Stroke modifica- tion [mm]
	22	7.5
	28	9.5
ASN	35	12
	43	15
	63	20

\neg			
		4	


Туре	Size	Stroke modifica- tion [mm]
	22	15
DSS	28	19
DE	35	24
DBN	43	30
	63	40

Tab. 47


Stroke modification of series DMS on request.

No stroke modification is possible for the DSD, DSC and DRT series. Each stroke modification influences the load capacities stated in the catalogue. It is possible that after a stroke modification important fastening holes might no longer be accessible. For more information please contact Rollon technical support.

Notes / ~

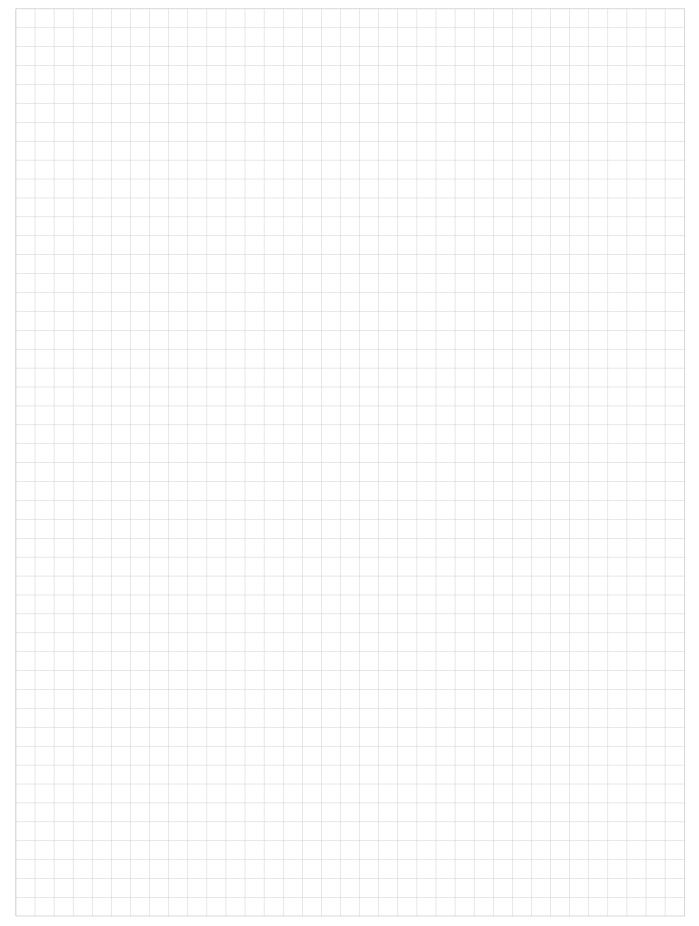

Notes / ~

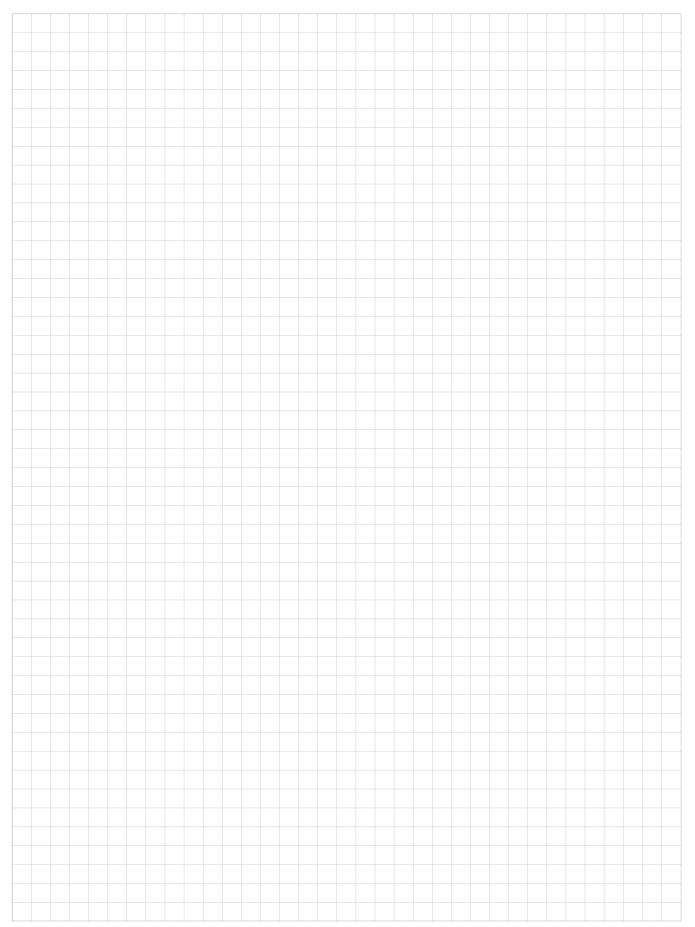



Opti Rail



Product explanation // V



Fully extending telescopic rails for manual movement



Fig. 1

Range of fully extending telescopic rails, extremely compact and highly rigid, with reduced deflection even when the telescopic rail is fully extended. The steel ball bearings ensure a high load capacity.

The most important characteristics:

- Full extension
- Compact construction
- Quiet and smooth operation
- Long life
- Reliable operation
- 2 types of hole pitch

Preferred areas of application:

- Railway (e. g. maintenance and battery extensions)
- Special Vehicles (e.g. fireworks, ambulance, mobile shops)
- Professional furniture
- Special machines
- Industrial drawers

LTH

Fully extending telescopic rail made of cold drawn steel, consisting of two rails, one fixed and one moveable, and of a central I-beam profile element. This element has high inertia and a very rigid construction, while boasting a very compact design. This ensures a high load capacity and reduced deflection even when the telescopic rail is fully extended.



Fig. 2

LTF

Fully extending telescopic rail consisting of two guide rails as fixed and movable elements and an S-shaped intermediate element. This special shape allows an extremely slim and compact design for movements that are only occasionally executed.



Fig. 3

Technical data /

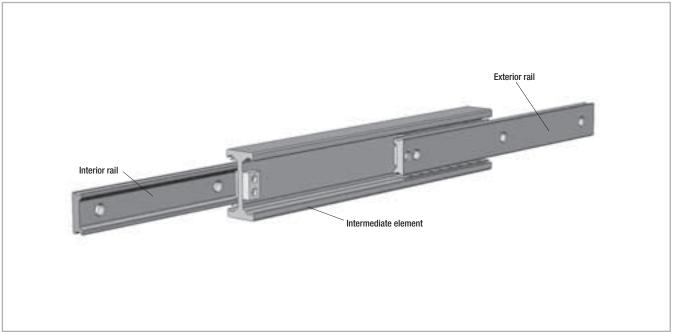


Fig. 4

Performance characteristics

- Temperature range: -30 °C to +170 °C (-22 °F to +338 °F)
- Max. operating speed: 0.3 m/s (depending on application)
- Available sizes LTH: 30 and 45
- Available sizes LTF: 44
- Sliders and LTH central element made of steel Cf53
- Sliders and LTF central element made of steel C43

Note:

- Horizontal movement installation is recommended
- Vertical movement installation on request
- Custom strokes on request
- All load capacity data are based on one telescopic rail
- Fixing screws of property class 10.9 must be used for all telescopic rails
- Internal stops are used to stop the unloaded slider and the ball cage.Please use external stops as end stops for a loaded system.

Dimensions and load capacity /



LTH30 RF

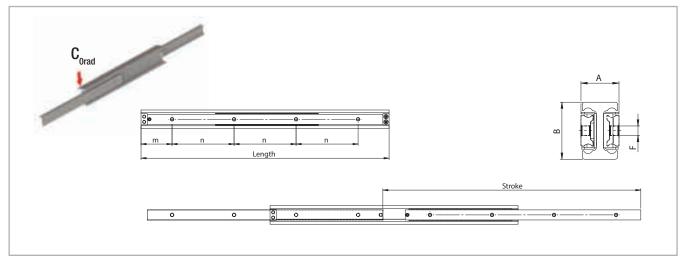


Fig. 5

Туре	Size	Length	Stroke	Α	В	m	n	F	Load capacity*	No. of holes	Weight*
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		C _{orad} [N]		[kg]
		250	285			25			202	3	0.88
		300	323			50			504	S	1.05
	40	350	377			25			521	4	1.23
		400	416			50			568		1.40
		450	485			25			582	5	1.58
		500	523			50			735	5	1.75
		550	577			25			732	6	1.93
		600	615			50			701	U	2.10
		650	685			25			615	7	2.28
LTH	30	700	723	20	30	50	100	M6	593	ľ	2.45
LIII	30	750	777	20	30	25 50	100	IVIO	550	8	2.63
		800	815						533	9	2.80
		850	884			25			481		2.98
		900	923			50			468	J	3.15
		950	977			25			441	10	3.33
		1000	1015			50			429	11	3.50
		1050	1084			25			396		3.68
		1100	1123			50			386		3.85
		1150 1176			25			368	12	4.03	
* The given lead		1200	1215			50			360	12	4.20

 $[\]ensuremath{^{\star}}$ The given load capacities and weights apply for a single extension

Tab. 1

LTH30 KF

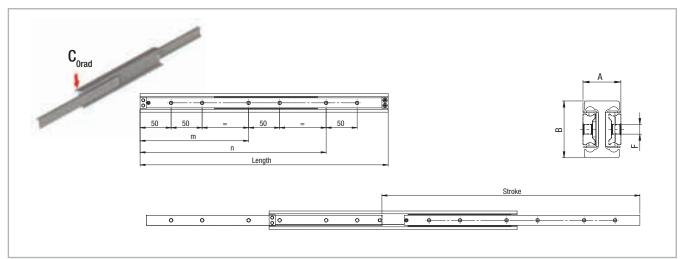


Fig. 6

Туре	Size	Length	Stroke	A	В	m	n	F	Load capacity*	No. of holes	Weight*
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		C _{0rad} [N]		[kg]
		250	285			-	150		202		0.88
		300	323			-	200		504	4	1.05
		350	377			-	250		521		1.23
		400	416			175	300		568		1,40
		450	485			200	350		582		1.58
		500	523			225	400		735		1.75
		550	577			250	450		732		1.93
		600	615			275	500		701		2.10
		650	685			300	550		615		2.28
LTH	30	700	723	20	30	325	600	M6	593		2.45
LIII	30	750	777	20	30	350	650	IVIO	550		2.63
		800	815			375	700		533	6	2.80
		850	884			400	750		481		2.98
		900	923			425	800		468		3.15
		950	977			450	850		441		3.33
		1000	1015			475	900		429		3.50
		1050	1084			500	950		396		3.68
		1100	1123			525	1000		386		3.85
		1150	1176			550	1050		368		4.03
		1200	1215			575	1100		360		4.20

^{*} The given load capacities and weights apply for a single extension

LTH45 RF

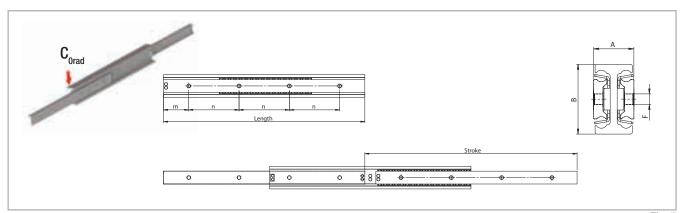


Fig. 7

Туре	Size	Length	Stroke	А	В	m	n	F	Load capacity*	No. of holes	Weight*																								
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		C _{0rad} [N]		[kg]																								
		250	276			25			1305	3	1.50																								
		300	310			50			1412	S	1.80																								
	350	388			25			1410	4	2.10																									
		400	422			50			1421	4	2.40																								
		450	478			25		1432	5	2.70																									
		500	512			50			1450	J	3.00																								
		550	590			25			1382	6	3.30																								
		600	624			50			1516	U	3.60																								
		650	680			25			1626	7	3.90																								
		700	714			50			1673	,	4.20																								
		750	770			25			1542	8	4.50																								
		800	826			50			1430	O	4.80																								
LTH	45	850	882	26	45	25	100	M8	1333	9	5.10																								
LIII	40	900	916	20		40	40	70	70	70	40	40	40	40	70	70	40	40	40	40	40	40	40	40	70	40	40	40	40	40	50	100	IVIO	1307	J
		950	972			25			1225	10	5.70																								
		1000	1028						50			1153	10	6.00																					
		1050	1084			25			1089	11	6.30																								
		1100	1118			50			1072		6.60																								
		1150	1174			25			1017	12	6.90																								
		1200	1230			50			967		7.20																								
		1250	1286			25			921	13	7.50																								
		1300	1320			50			909	.0	7.80																								
		1350	1376			25			869	14	8.10																								
		1400	1410			50			858	. '	8.40																								
		1450	1488			25			798	15	8.70																								
* The given lead o		1500	1522			50			789	.0	9.00 Tab. 3																								

 $[\]ensuremath{^{\star}}$ The given load capacities and weights apply for a single extension

LTH45 KF

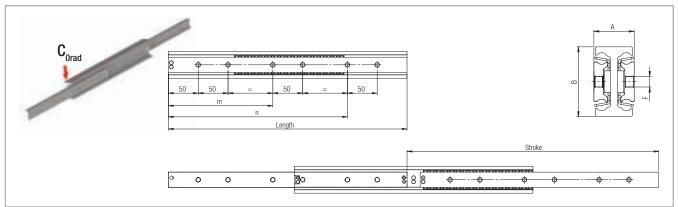


Fig. 8

Туре	Size	Length	Stroke	Α	В	m	n	F	Load capacity*	No. of holes	Weight*
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		C _{Orad} [N]		[kg]
		250	276			-	150		1305		1.50
		300	310			-	200		1412	4	1.80
		350	388			-	250		1410		2.10
		400	422			175	300		1421		2.40
		450	478			200	350		1432		2.70
		500	512			225	400		1450		3.00
		550	590			250	450		1382		3.30
		600	624			275	500		1516		3.60
		650	680			300	550		1626		3.90
		700	714			325	600		1673		4.20
		750	770			350	650		1542		4.50
		800	826			375	700		1430		4.80
LTH	45	850	882	26	45	400	750	M8	1333		5.10
LIN	40	900	916	20	40	425	800	IVIO	1307		5.40
		950	972			450	850		1225	6	5.70
		1000	1028			475	900		1153		6.00
		1050	1084			500	950		1089		6.30
		1100	1118			525	1000		1072		6.60
		1150	1174			550	1050		1017		6.90
		1200	1230			575	1100		967		7.20
		1250	1286			600	1150		921		7.50
	1300 1320		625	1200		909		7.80			
		1350 1376		650	1250		869		8.10		
	1400 1410		675	1300		858		8.40			
		1450	1488			700	1350		798		8.70
		1500	1522			725	1400		789		9.00 Tab. 4

 $[\]ensuremath{^{\star}}$ The given load capacities and weights apply for a single extension

▶ LTF44

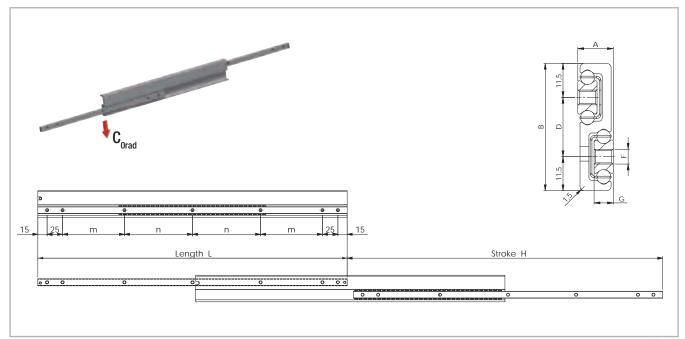


Fig. 9

Туре	Size	Length L [mm]	Stroke H [mm]	Load capacity		Cr	oss-secti	on	Fixed a	and mova	ble rail	Weight [kg/m]	
		[]	[]	C _{Orad} [N]	A [mm]	B [mm]	D [mm]	G [mm]	F	m [mm]	n [mm]	No. of holes	
		200	210	114						60			
		225	235	130						72,5			
		250	260	144						85			
		275	285	162						97,5			
		300	310	180						110			
		325	335	196						122,5	0	5	
		350	360	210						135			
		375	385	226						147,5			
		400	410	246						160			
		425	435	262						172,5			
LTF	44	450	460	276	12	43	20	6,5	M5	185			2,70
LII	44	500	510	312	12	40	20	0,0	IVIJ		110		2,70
		550	560	342						100	135		
		600	610	384						100	160		
		650	660	408							185		
		700	710	444							160		
		750	760	474							185	7	
		800	810	510							210		
		850	860	540						150	235		
		900	910	576							260		
		950	960	612							285		
		1000	1010	648							310		

Technical instructions



Load capacity

The given load capacities are guidelines for one extension slide mounted vertically with uniform load distribution (area load) when using all mounting holes. The load values must be reduced in unfavorable conditions.

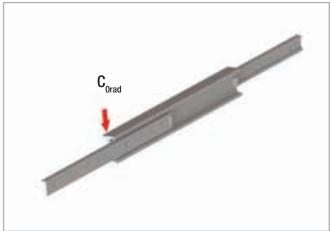


Fig. 10

Opening and closing force

■ The required actuation forces of a telescopic rail depend on the acting load and the deflection in the extended state. The force required for opening is principally determined by the coefficient of friction of the linear bearing. With correct assembly and lubrication, this is 0.01. During the extension, the force is reduced with the elastic deflection of the loaded telescopic rail. A higher force is required to close a telescopic extension, since, based on the elastic deflection, even if it is minimal, the movable rail must move against an inclined plane.

Anticorrosive protection

- All of the OPTI RAIL series have a standard anticorrosive protection by electrolytic galvanisation according to ISO 2081. If increased anticorrosive protection is required, the rails are available chemically nickel plated and with corrosion resistant steel balls.
- Numerous application-specific surface treatments are available upon request, e.g., as a nickel-plated design with FDA approval for use in the food industry.

For more information please contact Rollon Engineering.

Temperature

■ The OPTI RAIL series can be used up to an ambient temperature of +170 °C (+338 °F). A lithium lubricant for high operating temperatures is recommended for temperatures above +130 °C (+266 °F).

Lubrication


- Recommended lubrication intervals are heavily dependent upon the ambient conditions, speed and temperature. Under normal conditions, lubrication is recommended after 100 km operational performance or after an operating period of six months. In critical application cases the interval should be shorter. Please clean the raceways carefully before relubrication. Raceways and spaces of the ball cage are lubricated with a lithium lubricant of average consistency (roller bearing lubricant).
- Different lubricants for special applications can be supplied upon request. Example: Lubricant with FDA approval for use in the food industry. For more information please contact Rollon Engineering.

Installation instructions

- The internal stops are not designed to stop a moving load. They are only supposed to retain the ball-cage and prevent the internal parts from sliding out of the assembly. An external end-stop must always be installed to stop the moving load.
- To achieve optimum running properties, high service life and rigidity, it is necessary to fix the OPTI RAIL rails with all accessible holes on a rigid and level surface.
- Double-sided stroke available on request.
- When using an extension pair, please observe the parallelism of the installation surfaces. The fixed rail and the movable one will assume the rigidity of the mounting structure.
- The movement of the extensions is enabled by internal ball cages, which could experience an offset from the original position with differing strokes. This phase offset can have a negative effect on the running properties or limit the stroke. If differing strokes occur in an application, the drive force must be sufficiently dimensioned in order to appropriately synchronize the ball cage offset. As an alternative, an extra full stroke cycle can be performed after a number of cycles, in order to re-phase the ball cage in its correct position.

Ordering key OPTI RAIL /

> LTH

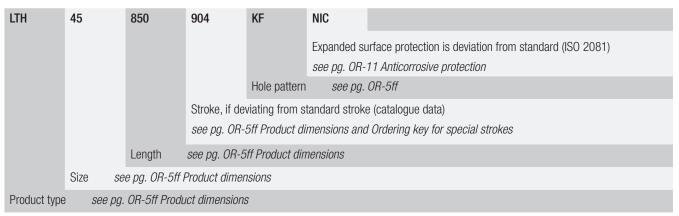

Ordering example 1: LTH45-0850-KF

Ordering example 2: LTH45-0850-0904-KF-NIC

Notes on ordering: Rail lengths and strokes are always stated with 4 digits. Please use zeroes to fill in for lengths with less than 4 digits

LTH Special strokes

Special strokes are defined as deviations from standard stroke.

They are each available as multiples of the values in tab. 6.

These values are dependent on the spacing of the ballcage.

Туре	Size	Stroke modifica- tion [mm]
LTH	30	15,4
LIN	45	22
		Tah 6

Tab. 6


Each stroke modification influences the load capacities stated in the cata-

logue. For more information please contact Rollon Application Engineering.

> LTF

LTF	44	690	NIC
			Expanded surface protection is deviation from standard (ISO 2081) see pg. OR-11 Anticorrosive protection
		Length	see pg. OR-9ff
	Size se	ee pg. OR-9ff	
Product type	see pg.	OR-9ff	

Notes / ~

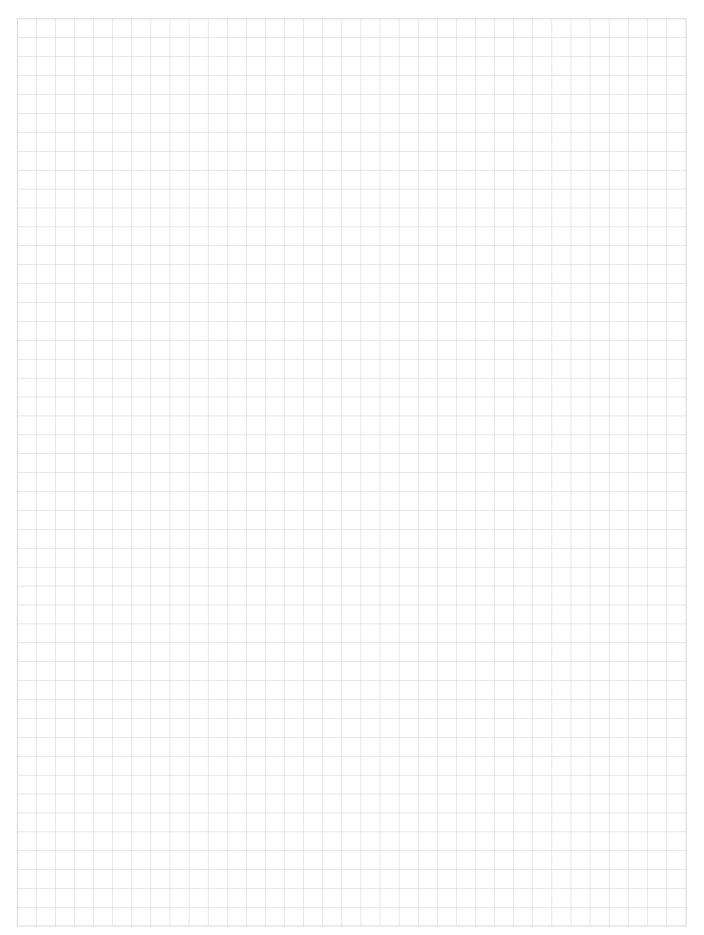



Light Rail



Product explanation



Light telescopic rails, with full or partial extension



Fig. 1

The Light Rail product family consists of five series with full and partial extensions in a lightweight design. It is ideal for applications in which the mass of the rail is just as important as the bending rigidity.

The most important characteristics:

- Light and quiet running with heavy loads
- Long service life without maintenance
- Effective self-cleaning of the ball track
- High functional reliability
- Structural elasticity capable of absorbing minor impacts and absence of permanent deformation
- Not sensitive to side impacts

Preferred areas of application:

- Beverage industry
- Automotive
- Construction and machine technology (e.g., housing)
- Packaging machines
- Railcars (e. g., maintenance and battery extensions)
- Special machines

LPS 38

Partial extension with rails made of hot-dipped galvanized steel and plastic ball cages.



Fig. 2

LFS 46

Detachable internal rail which can be released with a latch. Rails are made of bright chrome-plated steel, the ball cages of steel and plastic. Roll back protection in closed position.



Fig. 3

LFS 57

Full extension with rails made of hot-dipped galvanized steel and zincplated steel ball cages. Roll back protection in closed position.



Fig. 4

LFS 58 SC

Full extension with automatic retraction and damping. The automatic retraction system is assisted by a spring-loaded mechanism that allows the rail to get back to a complete retraction before reaching the closed position.



Fig. 5

LFS 70

Full extension with rails made of zinc-plated galvanized and blue passivated steel. The ball cages are made of zinc-plated steel. Heavy load end stop in opened and closed position. Roll back protection in closed position.



Fig. 6

LFX 27

The stainless steel full extension consists of two inner guide rails that, connected to a double-T profile, form the intermediate element and two outer rails that form the connection to the connecting construction as fixed and moving element. The square cross-section allows a compact design of high load ratings and low deflection.



Fig. 7

DRX-DRS

Roller type telescopic rail made of stainless or galvanized steel. Corrosion resistant even if scratched, exposed to solvents or to shocks.



Fig. 8

Technical data // V

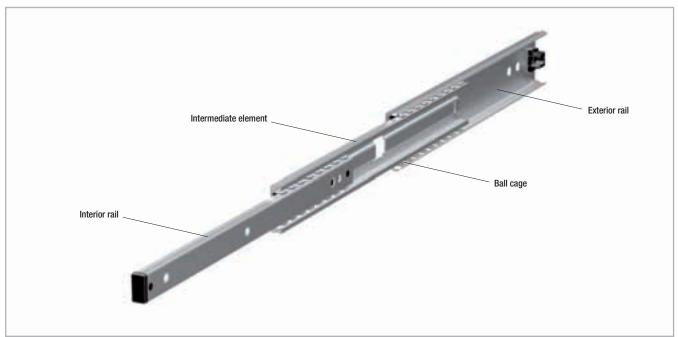


Fig. 9

Performance characteristics:

- Extension speed (depending on application):
 Extension distance 100 500 mm: max. 0.5 m/s (19.69 in/s)
 Extension distance 600 mm: max. 0.4 m/s (15.75 in/s)
 Extension distance 700 mm: max. 0.3 m/s (11.81 in/s)
- LFS 58 SC series with automatic retraction
- Temperature range: from +10 °C to +40 °C, for DRX/DRS From -30° to + 100° C

 Temporary storage and transport temperature:
 -20 °C to max. +80 °C (-4 °F to +176 °F)
- All systems are lubricated for life
- LFS/LPS rail material: hot galvanized or chromed steel
- LFS/LPS ball bearing cage material: galvanized steel or plastic
- LFS/LPS ball bearing material: hardened carbon steel
- DRX rail material: stainless steel AISI 316L
- DRS rail material: galvanized steel ISO 2081 compliant


Remarks:

- Assembly in cross-sectional width, here a positive tolerance of +0.5 mm is recommended (mounted under tension). If the extensions are installed with too small a tolerance, the service life is decreased
- Load capacity is per single rail (not per pair)
- Cycle data applies to the use of an extension pair (recommended)
- Vertical use of extensions (radial load) is recommended
- If mounted in a horizontal position, the load capacity will be reduced (see p. LR-12)
- Cathodic edge protection, additional corrosion protection with powder coating on request
- Roll back protection in closed position is friction locked (except LPS 38)
- Not suitable for moments must be used as extension pair

Dimensions and load capacity



▶ LPS 38

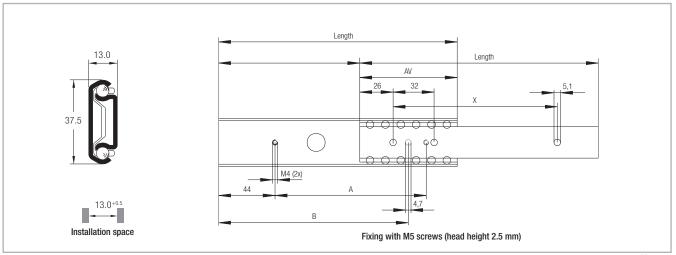

All dimensions given in mm

Туре	Size	Length	Extension loss	Stroke*	A	В	Х	Load capacity**	Load capacity**	Weight**
		[mm]	AV [mm]	[mm]	[mm]	[mm]	[mm]	C _{0rad} [N]	C _{oax} [N]	[kg]
		242	88	154	166	202	192			0.30
LPS	38	317	100	229	241	277	256	175	50	0.40
LPS	30	398		298	322	358	352			0.50
		473		373	397	433	416			0.60


 $^{^{\}star}$ $\,$ The stroke is the difference of the length, minus the extension loss AV $\,$

Tab. 1

Note: The given load capacities are guidelines with 100,000 cycles and uniform load distribution (area load) when using all mounting holes. The load values must be reduced in unfavorable conditions.

 $^{^{\}star\star}$ The given load capacities and weights apply for a single extension

LFS 46

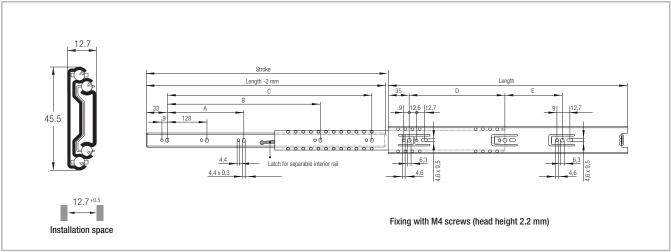

All dimensions given in mm


Туре	Size	Length	Stroke	A	В	С	D	E	Load capacity*	Load capacity*	Weight*
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	C _{Orad} [N]	C _{oax} [N]	[kg]
		300	305	-	-	242	192	-	150	F0	0.48
		400	406	-	256	342	160	96			0.64
LFS	46	450	457	-	200	392	100	160	175		0.71
LFO	40	500	508	-	352	442		128		50	0.79
		550	559	224	416	492	224	192	000		0.88
		600	610	224	410	542		224	200		0.95

^{*} The given load capacities and weights apply for a single extension

Tab. 2

Note: The given load capacities are guidelines with 50,000 cycles and uniform load distribution (area load) when using all mounting holes. The load values must be reduced in unfavorable conditions.

LFS 57

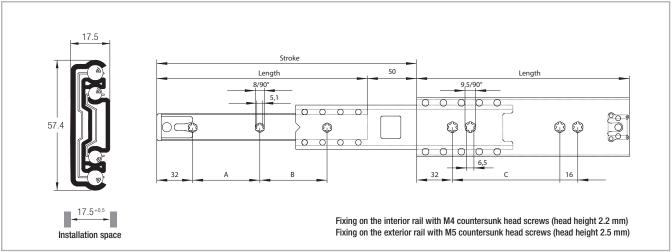

All dimensions given in mm Fig. 12

Туре	Size	Length	Stroke*	А	В	С	Load capacity**	Load capacity**	Weight**
		[mm]	[mm]	[mm]	[mm]	[mm]	C _{Orad} [N]	C _{oax} [N]	[kg]
		300	350	100	104	160	250		0.84
		350	400	128	152	256	300	80	0.98
		400	450	160	168		325		1.13
		450	500		224		350		1.27
LFS	57	500	550	224	208		375		1.42
LF3	57	550	600		256				1.57
		600	650	200	240	384	400		1.71
		650	700	288	288	304			1.86
		700	750	200	312				2.01
		750	800	320	360				2.16


 $^{^{\}star}$ $\,$ The stroke is the sum of the length, and the over extension

Note: The given load capacities are guidelines with 100,000 cycles and uniform load distribution (area load) when using all mounting holes. The load values must be reduced in unfavorable conditions.

Tab. 3

^{**} The given load capacities and weights apply for a single extension

LFS 58 SC

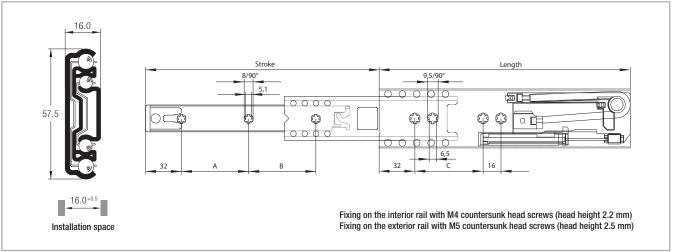

All dimensions given in mm

Туре	Size	Length	Stroke	A	В	С	Load capacity*	Weight*
		[mm]	[mm]	[mm]	[mm]	[mm]	C _{Orad} [N]	[kg]
		400	434	128	128	224	200	1.10
LEC	58	450	484	160	160	256	250	1.25
LFS	56	500	534	100	192	320	275	1.40
		550	584	192	192	320	300	1.55

^{*} The given load capacities and weights apply for a single extension

Tab. 4

Note: The given load capacities are guidelines with 100,000 cycles and uniform load distribution (area load) when using all mounting holes. The load values must be reduced in unfavorable conditions. Horizontal installation is not possible due to the damping system. The damping effect is reduced for loads of 450 N and higher per extension pair.

LFS 70

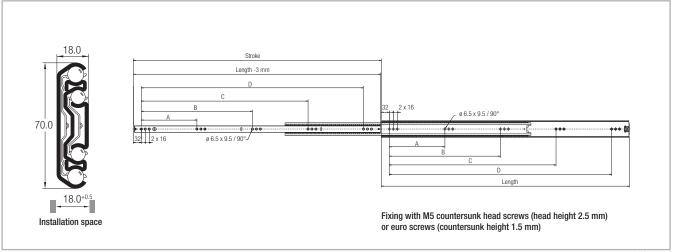


Fig. 14 All dimensions given in mm

Туре	Size	Length	Stroke	А	В	С	D		oad acity*	Load capacity*	Weight*
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	C _o	Orad N]	C _{0ax} [N]	[kg]
		400	400	-	-	-	288	525	900**	150	1,55
		450	450	-	-	160	320	575	950**		1,74
		500	500	-	-	192	384		975**		1,94
LFS	70	550	550	-	-	224	448	650	1000**		2,13
LF3	70	600	600	-	-	224	440	975**		2,32	
		700	700	-	192	384	576		875**		2,70
		800	800	-	224	448	672	600	725**		3,10
		1100	1100	224	448	672	896	450	525**	100	4,25

 $^{^{\}star}$ The given load capacities and weights apply for a single extension ** 10.000 cycles

Note: The given load capacities are guidelines with 10.000 cycles and uniform load distribution (area load) when using all mounting holes. The load values must be reduced in unfavorable conditions.

Tab. 5

LFX 27

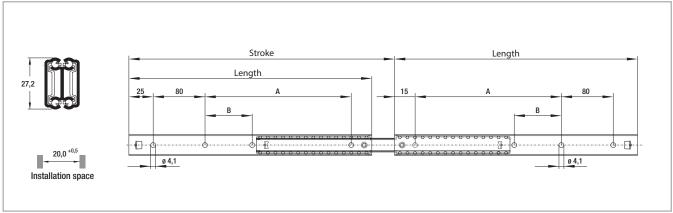



Fig. 15

Туре	Size	Length	Stroke	А	В		Load capacity* [N]		Weight*	
		[mm]	[mm]	[mm]	[mm]	C _{Orad}	C _{0ax}	C_{0rad}	C _{0ax}	[[ca]
		[mm]	[mm]	[mm]	[mm]	to 10.00	0 cycles	to 100.000 cycles		[kg]
		300	326	180	-	175	25		25	0,43
		350	376	230	70			125		0,49
LFX	27	400	426	280	100					0,57
LFA	21	450	476	330	100			125		0,64
		500	526	380	140					0,72
		550	576	430	160					0,82

^{*} The given load capacities and weights apply for a single extension

Tab. 6

DRX/DRS

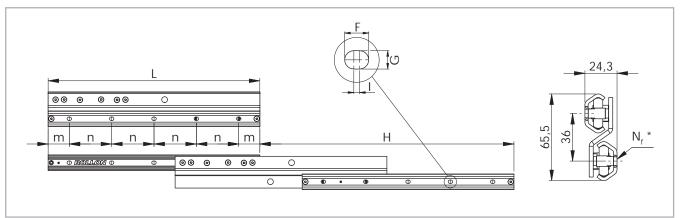

*Number of mounting holes Fig. 16

Туре	Size	Length	Stroke	Load			Fix	ed and mov	able rail			
		L [mm]	H [mm]	capacity* C _{orad} [N]	m [mm]	n [mm]	N _f [2 rails]	Holes for screws	Weight [kg/m]	F [mm]	G [mm]	l [mm]
		400	480	150			10					
		480	560	200			12	M5	3.40	8,4	6,4	
		560	640	240			14					
DRX		640	720	280			16					
	30	720	800	320	40	80	18					2
DRS		800	880	360			20					
		880	960	350			22					
		960	1040	310			24					
		1040	1120	250			26					

^{*} The given load capacities and weights apply for a single extension


Tab. 7

Technical instructions



Load capacities

Vertical installation (radial load)

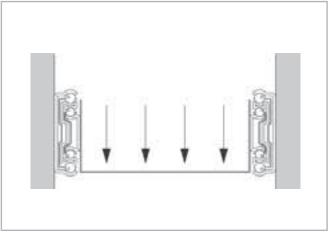


The given loading capacities are guidelines for an extension rail vertically mounted with uniform load distribution using all mounting holes.

The load values must be reduced in unfavorable conditions.

Fig. 17

Horizontal installation (axial load)

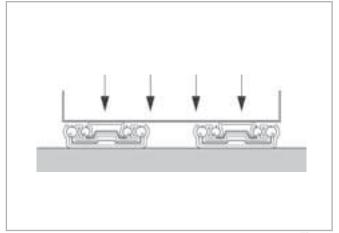

For horizontal mounted extensions the load capacity is reduced (see pg. LR-5ff).

The DRS/DRX series is not suitable for use on horizontal mounting (axial loads)

Fig. 18

Speed

The extension speed is determined by the size of the intermediate elements. Therefore, the maximum extension speed is inversely proportional to the overall extension of the rails (see fig. 19). The maximum extension speed is also directly related to the applied load and operating time. The indicated data refers to continuous operation at the maximum load capacity.

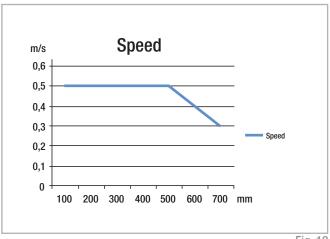


Fig. 19

Temperature

Continual operating temperature of the Light Rail extensions is +10 °C to +40 °C. Temporary storage and transport temperature: -20 °C to max. +80 °C. The operating temperature for the DRX/DRS rails ranges from -30 °C to +100 °C. For more information please contact the Rollon Application engineering department.

Lubrication

All extensions of the Light Rail product family are lubricated for life. Different lubricants for special applications are available upon request. Example: Lubricant with FDA approval for use in the food industry. For more information please contact the Rollon Application engineering department.

Corrosion protection

Base material for the Light Rail product family is cold-rolled, hot-dipped galvanized steel. The cathodic edge protection offers a perfect combination of quality and cost-efficiency. The surface protection conforms to RoHS. The DRX/DRS series rails are also available in the stainless steel version for a high corrosion resistance.

For more information please contact the Rollon Application engineering department.

Installation instructions

- The existing internal stops are not designed to stop the moving load. They are only supposed to retain the ball-cage and prevent the internal parts to slide out of the assembly. An external end-stop must always be installed to stop the moving load.
- To achieve optimum running properties, high service life and rigidity, it is necessary to fix the Light Rail extensions with all accessible holes on a rigid and level surface. When using an extension pair, please observe the parallelism of the installation surfaces. The fixed and movable rails will assume the rigidity of the mounting structure.
- Light Rail full and partial extensions are suitable for use in automatic systems. For this, the stroke should remain constant in all moving cycles and the extension speed must be checked (see pg. LR-13, fig.19). The movement of the extensions is enabled by internal ball cages, which could experience an offset from the original position with differing strokes. This phase offset can have a negative effect on the running properties or limit the stroke. If differing strokes occur in an application, the drive force must be sufficiently dimensioned in order to appropriately synchronize the ball cage offset. As an alternative, an extra full stroke cycle can be performed every certain number of cycles, in order to re-phase the ball cage in its correct position.

Horizontally installed guides

Horizontally intalled extesions can support tension or compression loads (see figs. 20 and 21).

For the horizontal mounting of extensions with compression loads, please take the following conditions into account: The Hertzian stress of the balls in no longer effective due to the expansion of the rail profile; the nominal tension tolerance of +0.5 mm is eliminated due to the installation confi-

guration. Both the above mentioned conditions contribute to a significant reduction of the axial load capacity.

Horizontally-mounted rails (axial load) also determine a considerably higher deflection of the extended tips if compared to traditionally vertically-mounted rails (radial load).

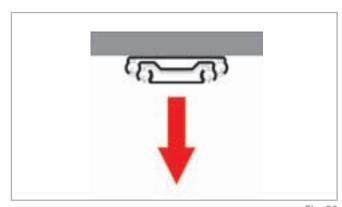


Fig. 20

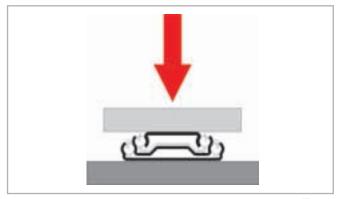


Fig. 21

DRX/DRS installation

- During installation care must be taken that the movable elements are assembled as in the figure; i.e. as the lower rail. The opposite upsidedown assembly negatively affects the function.
- Internal stops are used to stop the unloaded slider and the ball cage.Please use external stops as end stops for a loaded system.
- To achieve optimum running properties, high service life and rigidity, it is necessary to fix the telescopic rails with all accessible holes on a rigid and level surface.
- When using two telescopic rails, please observe the parallelism of the installation surfaces. The fixed and movable rails fit to the rigid assembly construction.


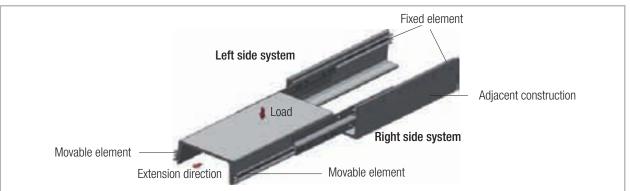


Fig. 22

Ordering key // ~


Light Rail

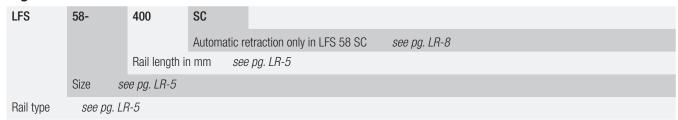


Ordering example: LFS58-0400SC

Notes on ordering: The rail lengths are always indicated as 4 digits with 0 prefixes

Notes / ~

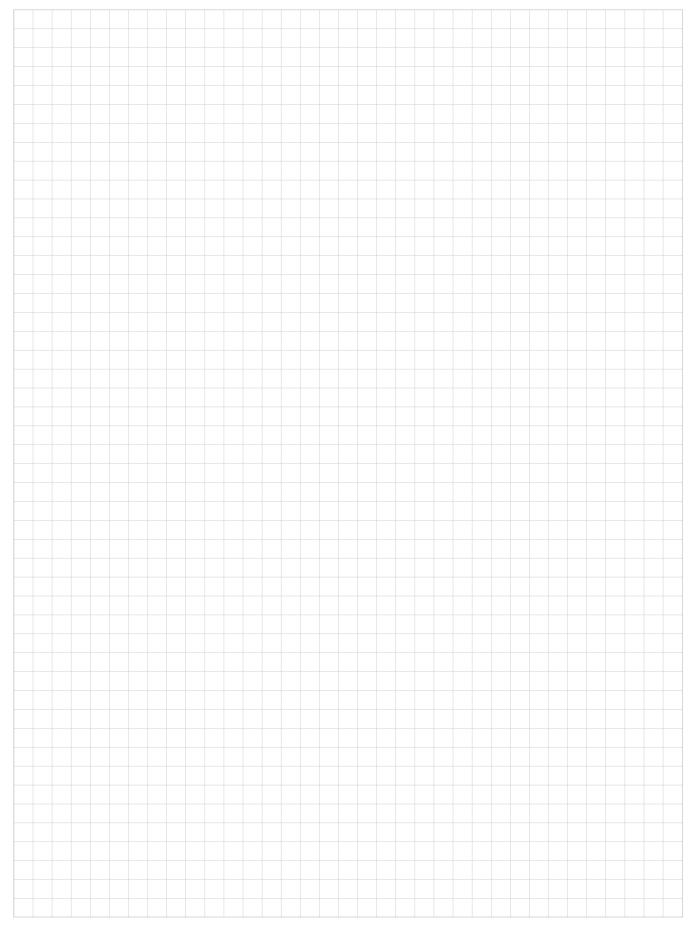


Notes / ~

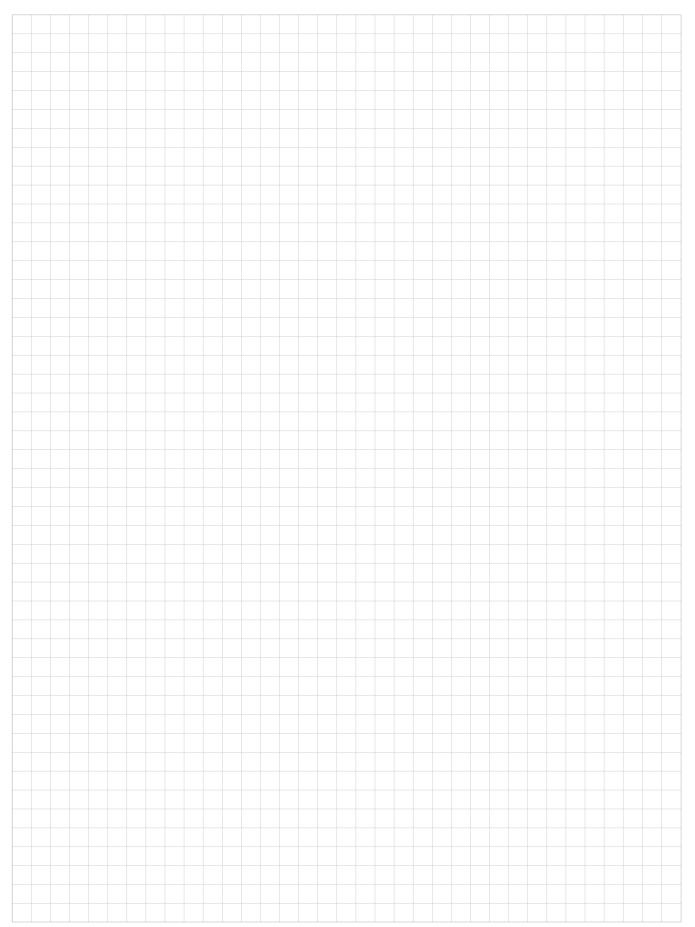

Guides suitable for all applications






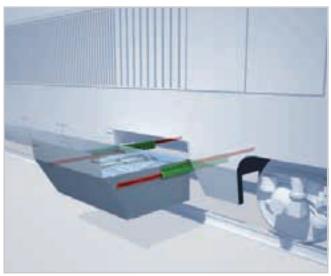







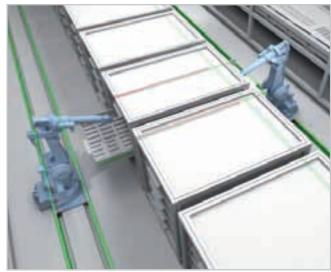















Branches:

ROLLON GmbH - GERMANY



Bonner Strasse 317-319 D-40589 Düsseldorf Phone: (+49) 211 95 747 0 www.rollon.de - info@rollon.de

ROLLON S.A.R.L. - FRANCE



Les Jardins d'Eole, 2 allée des Séquoias F-69760 Limonest

Phone: (+33) (0) 4 74 71 93 30 www.rollon.fr - infocom@rollon.fr

ROLLON Ltd - CHINA



51/F Raffles City, 268 Xi Zang Middle Road, 200001 Shanghai (China)
Phone: (+86) 021 2312 7582
www.rollon.cn.com - info@rollon.cn.com

ROLLON B.V. - NETHERLANDS



Ringbaan Zuid 8 6905 DB Zevenaar

Phone: (+31) 316 581 999 www.rollon.nl - info@rollon.nl

ROLLON Corporation - USA



101 Bilby Road. Suite B Hackettstown, NJ 07840 Phone: (+1) 973 300 5492 www.rolloncorp.com - info@rolloncorp.com

ROLLON India Pvt. Ltd. - INDIA



1st floor, Regus Gem Business Centre, 26/1 Hosur Road, Bommanahalli, Bangalore 560068 Phone: (+91) 80 67027066 www.rollonindia.in - info@rollonindia.in

Rep. Offices:





1st Lusinovsky Pereulok, 3B, Office 404 119049 Moscow (RUS) Phone: +7 (495) 799 42 29 www.роллон.рф - info@роллон.рф

Regional Manager:

ROLLON - SOUTH AMERICA



R. Joaquim Floriano, 397, 2o. andar Itaim Bibi - 04534-011, São Paulo, BRASIL

Phone: +55 (11) 3198 3645

www.rollonbrasil.com.br - info@rollonbrasil.com

Consult the other ranges of products





All addresses of our global sales partners can also be found at www.rollon.com

Distributor

